


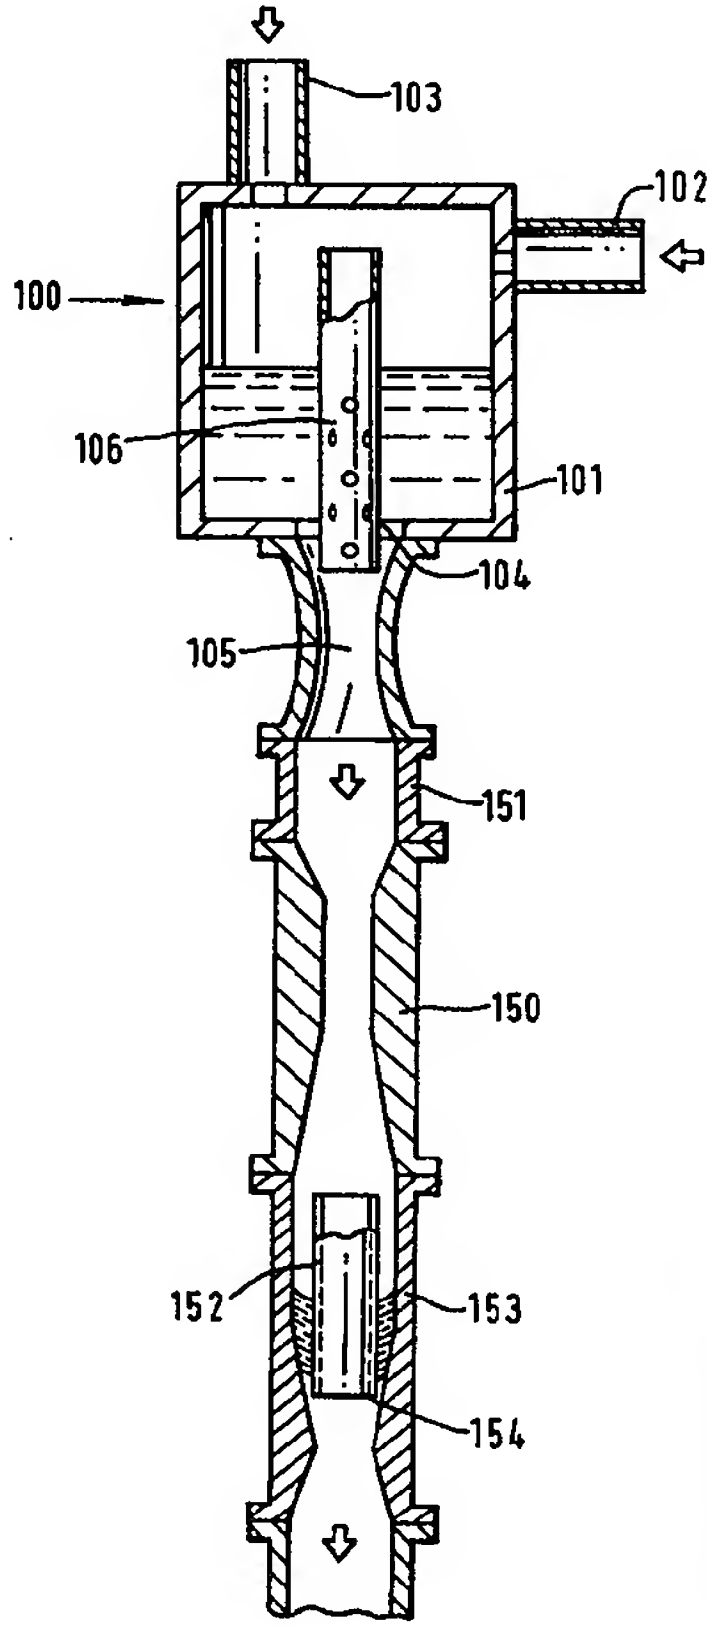

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B01D 53/18, C07C 9/04, 7/11, B01D 53/14, B01J 10/00	A1	(11) International Publication Number: WO 99/13966 (43) International Publication Date: 25 March 1999 (25.03.99)
(21) International Application Number: PCT/GB98/02772 (22) International Filing Date: 14 September 1998 (14.09.98) (30) Priority Data: 9719668.7 15 September 1997 (15.09.97) GB 9812148.6 5 June 1998 (05.06.98) GB (71) Applicant (for all designated States except US): DEN NORSKE STATS OLJESELSKAP A.S [NO/NO]; N-4035 Stavanger (NO). (72) Inventors; and (75) Inventors/Applicants (for US only): TORKILDSEN, Bernt, Helge [NO/NO]; Gutenbergsveien 19, N-5035 Bergen - Sandviken (NO). SIGMUNDSTAD, Martin [NO/NO]; Ragnhildsgt 32, N-4044 Hafsfjord (NO). LINGA, Harald [NO/NO]; Kringlebotn 267, N-5050 Nesttun (NO). NILSEN, Finn, Patrick [GB/NO]; Sore Furudalen 3, N-5044 Nattland (NO). (74) Agents: REES, David, Christopher et al.; Kilburn & Strode, 20 Red Lion Street, London WC1R 4PJ (GB).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report. With amended claims.
(54) Title: FLUID SEPARATION SYSTEM (57) Abstract A method of removing acid gas components from a gas mixture. The method comprises bringing the gas mixture into contact with a liquid solvent or reagent for the acid gases in a first turbulent contactor and subjecting the gas mixture and liquid to turbulent mixing conditions. This causes the acid gas to be absorbed by the solvent or reagent. The fluid mixture is passed into a second turbulent contactor and subjected to further turbulent mixing conditions causing further acid gas to be absorbed by the solvent or reagent. Optionally the fluid mixture is separated into a gas phase and liquid phase. 		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

Fluid Separation System

The present invention relates to fluid separation systems. It is particularly concerned with the selective removal of a component or components from a mixture of
5 gases using liquid solvent and is more particularly concerned with the absorption of acid gases such as CO_2 , NO_x , H_2S , oxides of sulphur etc. from natural gas and from combustion gases.

Conventional systems for the absorption of acid gases employ a liquid solvent; typical solvents include amines such as methyldiethanolamine (MDEA),
10 monoethanolamine (MEA) or diethanolamine (DEA) and mixtures of solvents. These solvents absorb CO_2 , NO_x , H_2S and other acid gases. The solvent is contacted with the sour gas mixture (gas mixture including acid gases) in a column which may be a packed column, a plate column or a bubble-cap column, or a column with some other form of contact medium. In these systems, the gas and liquid streams flow countercurrently.

15 The prior art absorption systems suffer the disadvantage that in order to achieve a significant degree of gas/liquid contact, the columns have to be large and their operation is hampered by excessive foaming. In addition, the subsequent stripping section which removes the acid gas from solution must also be large, to handle the large volume of solvent used. Since the operation normally takes place under high pressure and the
20 fluids involved are highly corrosive, the capital costs of the large columns and subsequent stripping section is high. Furthermore, operating costs and maintenance costs are high.

It is an object of the present invention to provide a system for removing acid gas from a sour gas mixture which does not suffer from the disadvantages of the prior art.

25 More generally, it is an object of the invention to provide a method of selectively absorbing one or more fluid components from a fluid mixture with a high degree of efficiency and more economically than in existing methods.

According to one aspect of the invention, there is provided a method of removing acid gas components from a gas mixture which comprises: bringing the gas mixture into
30 contact with a liquid solvent or reagent for the acid gases in a first turbulent contactor; subjecting the gas mixture and liquid to turbulent mixing conditions in the first contactor

thereby causing the acid gas to be absorbed by the solvent or reagent; passing the fluid mixture into a second turbulent contactor; subjecting the fluid mixture to further turbulent mixing conditions in the second contactor, thereby causing further acid gas to be absorbed by the solvent or reagent; and optionally separating a gas and liquid phase.

5 The invention also extends to the apparatus for carrying out this method.

 The turbulent mixing is very intense and results in extremely efficient gas liquid contact. The mixing regime is preferably turbulent shear layer mixing. The liquid entrained in the gas may be in the form of droplets for gas continuous fluid phase distribution. The efficient mixing means that the absorption can take place very rapidly
10 compared to that of a conventional absorption system. At the same time, the mixing system is simple and inexpensive, leading to reduced costs.

 The rate of reaction for the absorption of the selected gas by the solvent or reagent is significantly higher in the turbulent contactor than downstream in the pipe following the venturi (hereafter referred to as the contactor line). Therefore, the presence
15 of a second turbulent contactor reduces the residence time in the overall system while maintaining the same or improving the degree of absorption. This is particularly important in cases when the solvent employed has a low rate of absorption of the selected gas. Previously, a long residence time would require significant apparatus downstream, such as a long length of pipe, in which the rate of reaction is slower. This
20 need for large lengths of pipe to generate residence time is avoided in the present invention.

 In addition, conventional absorption methods involve the evolution of heat which must then be removed from the system. While the method of the invention is capable of operation with a relatively low pressure drop across the mixing means, when greater
25 pressure drop is employed, a cooling effect is achieved and this may render the need for additional cooling unnecessary. In low-pressure applications, the ability of the system to operate with a low-pressure drop over each contactor may avoid the need for high duty compressors.

 The absorption may be achieved by simply dissolving the gas or by way of a
30 chemical reaction with the solvent or reagent.

 Optionally, the fluid mixture is separated into a gas phase and a liquid phase

between the two contactors. The entry conditions would then be similar to those of the first contactor. Preferably, the phase separation occurs in an annular flow generator. It is also possible to draw off the liquid solvent containing the selected gas and to use fresh liquid solvent in the second contactor. This would be particularly effective if the solvent
5 was approaching saturation point on exit from the first contactor. The fresh solvent would have sufficient capacity to absorb most or all of the remaining gas component selected.

In a further application, a second selected gas could be withdrawn in the second contactor either using the same solvent or a different one. This solvent could be added at
10 the second contactor as a fresh liquid or could be present in the liquid entering the first contactor.

Preferably, the method is carried out as a continuous process with the gas mixture and liquid flowing co-currently. The co-current flow eliminates the problems associated with foaming, since separation can easily be effected downstream of the
15 contactor.

The first turbulent mixing may be achieved by any convenient means, such as an ejector or a jet pump or more preferably in a turbulent contactor comprising a vessel having a gas inlet, a liquid inlet, an outlet leading to a venturi passage, and a tube extending from the outlet back into the vessel. In a first embodiment of a turbulent
20 contactor, the tube is spaced from the periphery of the outlet and may or may not be perforated. In a second embodiment, the tube is perforated and is arranged so that all the fluid which passes through the outlet does so by way of the tube.

In one regime, the gas mixture is supplied to the tube, optionally directly, and the liquid is supplied to the vessel, whereby the gas mixture draws the liquid into the venturi
25 and the two phases are mixed. In another regime, the gas mixture is supplied to the vessel and the liquid is supplied to the tube, optionally directly, whereby the gas is drawn into the venturi by low pressure generated by the flow through the venturi, and the two phases are mixed. Alternatively, the liquid and the gas mixture are both supplied to the vessel, the liquid being supplied to a level above the level of the outlet, whereby the gas
30 is forced out through the outlet via the tube, thereby drawing the liquid into the venturi so that the two phases are mixed. In a preferred embodiment, the tube is spaced from the

periphery of the outlet, whereby the phase passing via the tube draws the phase in the vessel at the outlet into the outlet via the space between the tube and the outlet. Such a mixer is supplied by Framo Engineering A/S and is described in EP-B-379319.

5 The second turbulent mixing is preferably conducted in a turbulent contactor comprising at least one fluid inlet, an outlet leading to a venturi passage, and a tube extending from the outlet back into the contactor. Preferably, the second contactor has a gas inlet and a liquid inlet. The tube may or may not be perforated, and the gap between the tube and the outlet may be varied.

10 Preferably, the second turbulent contactor is located in a pipe extending from the venturi section of the first contactor. Said second turbulent contactor may also have a separate liquid inlet for the addition of fresh liquid solvent or reagent.

It will be appreciated that the invention is more broadly applicable than merely to the absorption of acid gas. Indeed, the principles of the invention may be applicable to any absorption application where the reaction kinetics are rapid. The invention is
15 also applicable to chemical reactions with fast reaction kinetics, where good mixing of the reactants is a requirement.

More generally, therefore, the invention may be considered to extend to a method for effecting mass transfer between a first fluid and a second fluid, in which the first fluid includes a plurality of components and the second fluid includes a solvent or a reagent
20 for one or more selected components of the first fluid, one fluid being in the gaseous phase, the other being in the liquid phase, the method comprising: subjecting the two fluids to turbulent mixing, thereby forming a homogeneous mixture, allowing a selected component to be absorbed by a respective solvent or reagent in the second fluid; passing the fluid mixture into a second turbulent contactor; and subjecting the fluid mixture to
25 further turbulent mixing conditions in the second contactor, thereby allowing further absorption of a selected component by a respective solvent or reagent in the second fluid. Preferably, the fluid mixture is separated into a gas phase and a liquid phase between the two contactors.

Several of the components may be absorbed, either by a common solvent or
30 reagent, or by respective solvents or reagents. In one possible regime, the first fluid is a gas mixture and the second fluid is in the liquid phase. In an alternative regime, the first

fluid is a liquid mixture or a liquid solution and the second fluid is in the gas phase.

Again, the invention extends to the apparatus for carrying out these methods.

According to a more specific aspect of the invention, there is provided a method for removing one or more selected gas components from a gas stream which comprises:
5 bringing the gas stream into contact with a liquid including a solvent or a reagent for a selected component in a first turbulent contactor; subjecting the gas stream and the liquid to turbulent mixing conditions in the contactor thereby causing a selected gas component to be absorbed by a respective solvent or reagent in the liquid; passing the fluid mixture into a second turbulent contactor; and subjecting the fluid mixture to further turbulent
10 mixing conditions in the second contactor, thereby causing further absorption of the same selected gas component, or absorption of another selected gas component, by a respective solvent or reagent.

The invention may be particularly useful where selective absorption of one or more gases is required. This selective absorption may take place in a single turbulent
15 contactor by adjustment of the residence time through the system. Alternatively, the selective absorption may take place in a multi-stage contactor. The method of the present invention allows for the absorption of a first selected component in a first contactor and a second component in a second contactor. The selected gases may be absorbed by the same solvent or reagent. In this case the selection is obtained by the different rates of
20 reaction. In particular, the first absorption may be instantaneous and therefore occur almost exclusively in a first contactor, while the second gas is absorbed slower in a second contactor. An example of this process is the absorption of hydrogen sulphide (H_2S) in a first contactor followed by the absorption of carbon dioxide (CO_2) in a second contactor. The rate of reaction of H_2S absorption in amine is so quick as to be virtually
25 instantaneous.

In a second embodiment, the one or more selected gases may be absorbed by different solvents or reagents. The solvents or reagents may all be present in the liquid supplied to the first contactor, or the respective solvents or reagents for the second and subsequent gases may be added prior to the respective contactors.

30 Preferably, the fluid mixture is separated into a gas phase and a liquid phase between the two contactors. This phase separation may be achieved by any convenient

means, preferably by an annular flow generator. The method is preferably carried out as a continuous process with the gas mixture and the liquid flowing co-currently.

The preferred features of the contactors and the methods of operation described above in connection with removing acid gas components from a gas mixture are equally
5 applicable to the method described above.

The method may optionally include the further steps of: cooling the mixture after the second turbulent mixing; separating the cooled mixture into a gas phase and a liquid phase; removing the gas phase; subjecting the solvent in the liquid phase to a regeneration treatment to remove the absorbed selected gas component; and recycling
10 the regenerated solvent-containing liquid phase to the mixture. The separation of the cooled mixture into a gas phase and a liquid phase may be achieved by any gas/liquid separator, such as a hydrocyclone.

Preferably, the regeneration is carried out by heating and/or by flashing off the absorbed gas component in a flash tank. Preferably, the post mixing cooling and the
15 regenerative heating are achieved, at least in part by mutual heat exchange. Preferably, in instances where the gas mixture is at a low pressure, the liquid is pumped to the first turbulent contactor and thereby draws the gas mixture with it through the contactor. Preferably, when the gas mixture is at high pressures, it is conveyed to the first turbulent contactor at a high pressure and thereby draws the liquid with it through the contactor.

20 The invention also extends to apparatus for carrying out such a method, comprising: a first turbulent contactor having a liquid inlet, a gas inlet and a fluid outlet; a second turbulent contactor having at least one fluid inlet and a fluid outlet; a cooler for the fluid stream from the fluid outlet of the second turbulent contactor; a hydrocyclone arranged to separate the cooled fluid stream into a gas phase and a liquid stream; a
25 regenerator arranged to treat the separated liquid stream; and a recycle line arranged to convey the regenerated liquid stream to either the first or second contactor or to a reservoir tank.

The apparatus may include an annular flow generator between the two contactors. The apparatus may include a pump arranged to supply liquid to the liquid
30 inlet of the first contactor. Preferably, the regenerator is a heater and/or a flash tank.

Preferably, the first turbulent contactor comprises a vessel having a gas inlet, a

liquid inlet, an outlet leading to a venturi passage, and a tube extending from the outlet back into the vessel. In a first embodiment, the tube is spaced from the periphery of the outlet and may or may not be perforated. In a second embodiment, the tube is a perforated tube arranged so that all the fluid which passes through the outlet does so by way of the tube.

Alternatively the first turbulent mixing may take place in an ejector or a jet pump.

Preferably, the second turbulent contactor comprises at least one fluid inlet, an outlet leading to a venturi passage, and a tube extending from the outlet back into the contactor. Preferably, the second contactor has a gas inlet and a liquid inlet. Optionally, the second contactor is located in a pipe extending from the venturi section of the first contactor.

The invention may be considered to extend to the use of one or more turbulent contactors for selectively absorbing one or more gas components from a gas stream, in which the gas stream is brought into contact with a liquid including solvents or reagents for the selected gas components, the absorption rate of reaction for the selected gas components being different thereby causing the selected components to be absorbed separately. Optionally, a first selected component is absorbed in a first contactor and a second selected component is absorbed in a second contactor. In particular, the invention extends to the use of such a system when the gas stream is at high pressure and the first absorption is instantaneous.

The preferred features of any of the various aspects of the invention described above may be equally applicable to the other aspects of the invention.

The improved efficiency and selectivity possible for the removal of acid gases makes the present invention particularly valuable as awareness is increased of the potential damage to the environment that can be caused by acid gases in effluents such as combustion gas.

Furthermore, the small size of the apparatus compared to conventional absorption columns render the invention especially applicable to use in marine applications, such as on board shuttle tankers.

The invention may be put into practice in various ways and a number of specific

embodiments will be described by way of example to illustrate the invention with reference to the accompanying drawings, in which:

Figure 1 is a flow diagram of the process for use when the gas is under low pressure;

5 Figure 2 is a flow diagram of the process for use when the gas is under high pressure;

Figure 3 is a view of a suitable first turbulent contactor;

Figure 4 shows an alternative first contactor design;

10 Figure 5 shows a contactor similar to that in figure 3 but with the perforated tube arranged so that all the fluid which passes through the outlet does so by way of the tube;

Figure 6 shows a variant of the contactor shown in figure 5;

Figure 7 shows a jet pump for use as an alternative to the contactors of figures 3 to 6;

15 Figure 8 shows a second turbulent contactor located in the pipe extending from the venturi section of the first turbulent contactor;

Figure 9 is a block diagram of the apparatus as used in a series of experiments;

Figure 10 is a schematic diagram of a sampling point;

Figure 11 is a graph of predicted outlet CO₂ concentration against measured outlet concentration in the turbulent contactor; and

20 Figure 12 is a graph of CO₂ concentration versus residence time in the contactor pipeline for different exhaust gas mixtures.

In one embodiment of the invention, a continuous process operation for the removal of one or more selected gases from a gas stream is shown in figure 1. A liquid solvent stream 1, for example MEA (monoethanolamine), is conducted by a pump 2 to a
25 first turbulent contactor 3 (though this could be an ejector) capable of inducing turbulent mixing. A gas stream 4, including the gases which are to be removed, is drawn into the first contactor 3 by the low pressure generated in the venturi by the liquid stream after it has passed through the pump (stream 1a). This arrangement provides an automatic means of self-regulation as the gas mixture to solvent ratio can be maintained for varying
30 flow rates. At the outlet of the first contactor 3 the liquid solvent and the gas stream are in the form of a homogeneous mixture (stream 5) and the mass transfer of the selected

gases from the gas phase to the liquid occurs very rapidly.

The mixed two-phase stream 5 is then conveyed to a second turbulent contactor 6. If there are two different gases to be removed, the liquid solvent containing the first gas may be separated before entry into the second turbulent contactor. This separation
5 may be via any suitable means, for example a hydrocyclone. The liquid solvent may be treated to remove the selected gas and then recycled through the first contactor.

The fluid mixture may be subjected to phase separation into a gas phase and a liquid phase by, for example, an annular flow generator (not shown) before entry into the second turbulent contactor. There may or may not be additional fresh liquid solvent
10 added via stream 7, which may or may not be at the same pressure as the fluid in stream 5. Further mass transfer occurs in the second turbulent contactor. The same gas may be absorbed in the same reagent or a second gas may be absorbed in an appropriate reagent in the second contactor. This reagent may be the same as that for the first gas or may be different.

15 The mixed 2-phase stream 8 at the outlet of the second turbulent contactor is then conveyed to a cooler 9 and to a hydrocyclone 10. The "cleaned" gas stream 11 is taken off and the liquid stream 12 passes on to a regeneration system. At this point in the circuit all the selected gases are in the liquid phase (stream 12) and the gas stream 11 contains little of the selected gases. The selected gases may be CO₂, H₂S or other acid
20 gases to be removed from exhaust gas.

The regeneration of the liquid solvent is achieved by boiling off the selected gas in a heater 13. The selected gas is taken off as a gas stream 14 and the liquid solvent is optionally passed through a flash tank (not shown) to remove any residual dissolved gas before being recycled into the feed stream 1. The liquid solvent in stream 1 is topped up
25 from the reservoir 15 as necessary to maintain a regular flow rate around the system.

It will be clear to a person skilled in the art that the cooler 9 and the heater 13 may be combined to form a heat exchange unit.

An alternative system for the removal of selected gases from a high-pressure gas stream is shown in figure 2. A high-pressure gas stream 20 containing the selected gases
30 which are to be removed is conveyed to a first contactor 21 similar to that shown in figure 3. The high pressure of the gas draws a controlled amount of liquid solvent, for

example MEA, from the recycle stream 22 and, if necessary, from a reservoir 23 into the contactor 21.

At the outlet of the contactor 21 the two phases are in the form of a homogeneous mixture (stream 24) and the mass transfer of the selected gas from the gas stream to the liquid solvent takes place. The residence time may be as little as 0.1 seconds since, for example, the reaction kinetics for the absorption of CO₂ by MEA are very rapid. The required residence time will vary with the solvent used and the gas to be transferred from the gas to the liquid.

The two phase mixture (stream 24) may be separated into a gas phase and a liquid phase, for example by an annular flow generator (not shown), before entry into a second contactor 25. Alternatively, the liquid phase may be taken off and treated to remove the first selected gas thereby regenerating a first liquid solvent. Additional liquid may be added to the second turbulent contactor from a reservoir 26, either to include an appropriate solvent for the second selected gas, or to top up the liquid solvent to maintain a suitable flow rate around the system. Again, mass transfer occurs from the gas phase to the liquid phase in the second turbulent contactor.

The two-phase mixture (stream 27) passes through a cooler 28 to a hydrocyclone unit 29. The gas stream free of the selected gas(es) is taken off in stream 30 and the remaining liquid stream 31 including the selected gas(es) is passed to a regeneration system.

The liquid stream 31 is fed into a heater 32 to remove the selected gas(es) as a gas stream or streams 33. This regenerates the solvent for re-use in the system. This solvent (stream 22) is then drawn into the contactor 21 by the low pressure generated in the venturi by the high-pressure gas (stream 20) as explained above. Any shortfall in the solvent liquid is made up by addition from the reservoir 23. As in the first embodiment, the heater 32 and the cooler 28 can be combined to form a heat exchange unit.

The first turbulent contactor used in both the above embodiments may be that shown in figure 3. The turbulent contactor 100 comprises a vessel 101 having a gas inlet 102, a liquid inlet 103 and an outlet 104 leading to a venturi passage 105. There is a tube 106 (which may or may not be perforated) extending from the outlet 104 back into the vessel 101.

In a first arrangement, the gas mixture is supplied to the vessel 101 and the liquid is supplied to the tube 106 whereby the gas is drawn into the venturi by the liquid and the two phases are mixed.

5 In a second arrangement, the liquid is supplied to the vessel 101 and the gas mixture is supplied to the tube 106, whereby the liquid is drawn into the venturi by the gas and the two phases are mixed.

In a third arrangement, the liquid and the gas mixture are supplied to the vessel 101, the liquid being supplied to a level above the level of the outlet 104, whereby the gas is forced out through the outlet 104 via the tube 106, thereby drawing the liquid into
10 the venturi so that the two phases are mixed.

A fourth variant is shown in figure 4. This embodiment is similar to that shown in figure 3, but the contactor 110 is inverted. It comprises a vessel 111 with a liquid inlet 112, a gas inlet 113 and an outlet 114 leading to a venturi passage 115. There is a tube 116 (which may or may not be perforated) extending from the outlet 114 back into the
15 vessel 111. The tube 116 may be connected directly to the gas inlet 113.

The contactor may alternatively be that shown in figure 5. The turbulent contactor 120 comprises a vessel 121 having a first fluid inlet 122, a second fluid inlet 123 and an outlet 124 leading to a venturi passage 125. There is a perforated tube 126 extending from the outlet 124 back into the vessel 121. The perforated tube 126 is
20 arranged such that there is no gap at the outlet 124 of the vessel 121 for the fluids to pass through. The result of this arrangement is that all the fluid exits the vessel 121 via the perforated tube 126.

In a first arrangement, the gas mixture is supplied to the vessel 121 and the liquid is supplied to the tube 126 whereby the gas is drawn into the venturi by the liquid and the
25 two phases are mixed.

In a second arrangement, the liquid is supplied to the vessel 121 and the gas mixture is supplied to the tube 126 whereby the liquid is drawn into the venturi by the gas and the two phases are mixed.

In a third arrangement, the liquid and the gas mixture are supplied to the vessel
30 121, the liquid being supplied to a level above the level of the outlet 124, whereby the

gas is forced out through the outlet 124 via the tube 126, thereby drawing the liquid into the venturi so that the two phases are mixed.

A fourth variant is shown in figure 6. This embodiment is similar to that shown in figure 5, but the contactor 130 is inverted. It comprises a vessel 131 with a liquid inlet 132, a gas inlet 133 and an outlet 134 leading to a venturi passage 135. There is a perforated tube 136 extending from the outlet 134 back into the vessel 131. As for the embodiment shown in figure 5, the perforated tube 136 is arranged such that there is no gap at the outlet 134 of the vessel 131 for the gas mixture to pass through. All the fluids must pass through the perforated tube 136 to the venturi passage 135.

In this embodiment, the liquid is forced up the tube 136 and the gas is drawn into the venturi passage 135 by the liquid and the two phases are mixed. Since the tube 136 is perforated, the gas is drawn into the tube 136 through the perforations.

The first turbulent contactors referred to in the above embodiments may be replaced by jet pump arrangements which are capable of inducing turbulent mixing. Figure 7 shows a jet pump 140 comprising a first fluid inlet 141 for the high-pressure fluid and a second fluid inlet 142 for the low-pressure fluid. The high-pressure fluid draws the low-pressure fluid along the length of the jet pump 140 to the outlet 143. The fluids are well mixed into a homogenised mixture in the region 144 at the outlet of the high-pressure inlet 141.

Figure 8 shows an example of the second turbulent contactor being located in a pipe extending from the venturi section of the first contactor. In this example, the first turbulent contactor is the embodiment shown in figure 3, although other embodiments of the first turbulent contactor are equally applicable. The homogeneous gas/liquid mixture from the first turbulent contactor 100 enters an annular flow generator 150 from a spool piece 151, or directly from the diffuser of the venturi 105. As the gas/liquid mixture flows through the expanding outlet part of 150, a liquid film establishes at the wall to form an annular gas/liquid flow essentially with the gas in the pipe core and the liquid at the pipe wall. The liquid film will be maintained in the annulus between inner and outer pipes 152 and 153 respectively.

The conditions at the outlet 154 of the inner pipe 152 are similar to the conditions at the outlet 104 of the first turbulent contactor. Therefore, an additional stage has been

added to the process. It is clear that, in principle, any number of stages can be added to the system, although considerations such as pressure drop should be taken into account.

The invention is not limited to the embodiment of the second turbulent contactor shown here. For example, a limited performance system can be operated without the
5 annular flow generator 150 since there will be a certain liquid film flow on the walls of the pipe from the first turbulent contactor.

As stated previously, the second turbulent contactor may also be equipped with an inlet pipe from a liquid reservoir. This may either distribute additional fresh solvent to absorb the selected gas, or may add a second solvent or reagent chosen to remove a
10 second selected gas component.

In one embodiment, the two or more contactors are used to selectively absorb one or more gas components from a gas stream. In this case, the absorption rate of reaction for the selected gas components is different causing the first selected component to be absorbed in the first turbulent contactor and the second selected component to be
15 absorbed in the second turbulent contactor. This embodiment is particularly effective when a common solvent is used for each of the two or more gases and the first absorption is instantaneous. An example of this is the selective absorption of H_2S and CO_2 from, for example, natural gas, using seawater as the solvent. In this case, all the H_2S is absorbed virtually instantaneously in the first contactor and the CO_2 is absorbed in
20 the second contactor. The liquid containing the H_2S may be removed and regenerated between the two contactors.

In a second embodiment, the second contactor may be used to further remove the selected gas. This is particularly applicable in cases where the rate of absorption is slow. A second turbulent contactor will increase the amount of absorption without the need for
25 large amounts of piping downstream of the contactor to provide the necessary residence time. In particular, the low pressure drop across these systems enable them to be used in low pressure situations where it would normally not be possible to use more than one contactor without using compressors.

The invention is further illustrated by reference to the following examples. These
30 serve to verify the operating principles of the invention. In particular it is intended to show that the rate of reaction is faster in the contactors than in the pipe section

downstream by comparing theoretical models with experimental results.

In a series of experiments conducted, the performance of prediction models for the absorption of CO₂ from a diesel engine exhaust was compared with the experimental results. The contactor used was a FRAMO contactor generally as described in EP 379319 and shown in Figure 3. The mixer injection pipe was adjusted to yield a gas/liquid ratio of about 25 and a superficial mixture velocity of about 15 m/s in the contactor line. The exhaust gas was at a pressure of 0.3 barg. The solvent used was a 50% by volume mixture of water and MEA at a temperature of 10°C.

A schematic diagram of the apparatus for the series of experiments is shown in Figure 9.

The apparatus in figure 9 comprises a contactor 51, corresponding to that shown in figure 3, a vertical pipe section 56 leading from the venturi 52, and a horizontal pipe section 59 joining the vertical section 56 to a receiver 61. The vertical section 56 has two quick closing valves 57,58. A reservoir of liquid solvent 54 leads to the contactor 51 via a valve 55. A diesel engine 75 has its exhaust connected to the contactor via a line 71 including an orifice plate 74. The line 71 is provided with a by-pass valve 70 in a by-pass line 72.

The receiver 61 is slightly inclined and has a liquid drain 65 at its lowest point, leading to a tank 67 via a valve 66. The tank 67 has an outlet 68 with a valve 69. The receiver 61 also has a gas cylinder 62 (not used) which can be used to pressurise the reservoir 61 via a line 63 with a valve 64.

Measurements are taken variously at five sampling points designated SP in figure 9. SP_{Exhaust} is located at the exhaust entry to the contactor 51. SP₁ is 1 metre after the contactor with SP₂ and SP₃ within the next 1.5 metres. SP₄ is in a vertical portion of the pipe 59, SP₅ is at the entry to the receiver 61 and SP₆ is at the opposite end of the receiver 61. The final SP₇ is in the receiver outlet.

Each sampling point, as shown in Figure 10, comprises a centrally located sampling tube 81 opening in the downstream direction and protected by a cap 82. The cap serves to reduce liquid entrainment in the gas sample. The sampling tube leads to a hydrocyclone 83 which removes any residual moisture so that dry gas leaves the gas outlet 84 for analysis.

The contactor 51 and pipe section 56 were charged with liquid solvent from the reservoir tank 54. Exhaust gas from a YANNMAR 4TN84E 15 KVA water-cooled diesel engine 75 was used as the feed gas. A 30% load was placed on the diesel engine to increase the exhaust gas temperature and also to obtain a higher level of CO₂ in the exhaust gas. An even more elevated CO₂ level could be obtained by supplying CO₂ from a pressurised CO₂ gas bottle into line 71 (not shown in figure 9). The orifice plate 74 provided for continuous flow measurement of the exhaust gas.

The approach was based on sampling continuous flow in the pipe. The sampling probes were situated in the centre of the pipe with a cover, which accommodated the retrieval of a gas/liquid sample with low liquid content. This two-phase flow from each sampling was then routed through a gas/liquid cyclone from which a dry gas sample was taken from the gas outlet. [This arrangement with the sampling probe described could be repeated in seven different locations downstream of the first contactor as well as in the exhaust feed entering the contactor.] The sampling locations are shown on Figure 9 and referred to in the Tables.

An experiment would commence by initially charging exhaust gas into the first stage contactor to the steady state pressure level experienced for a long run. The quick opening/closing valves were then triggered to open and two-phase flow admitted through the system. After steady state conditions were achieved, gas samples were taken from the sampling points. The residence times as reported in the Tables were calculated from the total flow rate of gas and liquid, local position in a given pipe section and the pipe length and diameter of the connected sections. The analyses were carried out using a Chromopack Model CP 2002 chromatograph.

The results of the experiments are shown in the Tables. The predicted concentrations listed in the Tables are calculated from models for the two sections in the overall system – the gas/liquid contactor and the contactor pipeline.

Looking first at the contactor pipeline, this serves to transport the gas-liquid mixture from the contactor to a gas/liquid separator, and to continue the CO₂ absorption from the gas mixture to the liquid solvent during the pipeline transport.

Unlike the flow through the gas liquid contactor, the flow is not exposed to any variations in pipe diameter. In normal operation the pipeline flow can therefore be

classified as a steady state flow both with respect to time and position. The pipe flow regime and associated CO₂-absorption performance is then characterised by the local superficial gas and liquid velocities, the pipe inclination, the pressure level and the fluid properties. If the flow conditions correspond to annular-dispersed flow (high superficial mixture velocity) the CO₂ reduction rate of the gas mixture can be assumed to be a function of the local conditions only. Analogous to most attenuation/absorption processes in nature the reduction of CO₂ from the gas mixture obeys a first order differential equation:

$$\frac{dn_G}{dt} = -\frac{1}{\tau} \cdot n_G \cdot \left(1 - \frac{n_L}{n_{L \max}}\right) \quad (1)$$

where n_G is the concentration of CO₂ in the gas mixture, τ is the characteristic time constant of the process, n_L is the number of moles CO₂ in the solvent per unit volume of the solvent, $n_{L \max}$ is the maximum number of moles CO₂ in the solvent per unit volume of the solvent (saturation).

For the system pressures and solvent types in concern:

$$\frac{d}{dt} \left(\frac{n_L}{n_{L \max}} \right) \ll -\frac{dn_G}{dt} \quad (2)$$

15

Which upon integration of equation (1) yields:

$$n_G = n_{G0} \cdot \exp \left(-\frac{1}{\tau} \cdot \left(1 - \frac{n_L}{n_{L \max}}\right) \right) \quad (3)$$

where n_{G0} is the mole fraction CO₂ in the gas mixture at time $t=0$.

Equation (3) shows that the CO₂ in the gas mixture drops exponentially as the two-phase mixture of gas and solvent propagates along the contactor pipeline. The time t represents the residence in the pipeline as calculated from the superficial mixture velocity U_m and the distance propagated by the two-phase mixture. The effect of partial CO₂ saturation of the solvent is observed to increase the characteristic time constant τ by a factor of $1/(1-n_L/n_{L \max})$ and hence serves to reduce the absorption rate of CO₂ into the solvent. By measuring the mole fraction CO₂ at several positions along the contactor

pipeline, the time constant τ can be determined experimentally. The time constant is assumed to be a function of superficial mixture velocity, gas/liquid flowrate ratio, solvent mixture, system pressure and temperature.

Turning now to a model for the gas-liquid contactor. Upstream of the mixing point the separated gas and liquid phases are guided into an annulus-venturi mixer geometry. Initially, the liquid flows in the annulus and the gas flows in the core of the conical shaped mixer pipe. Due to significantly different velocity profiles for the gas and the liquid at the mixing point, a high shear flow is generated in the contactor. This enhances the gas-liquid interaction and thus also the homogeneity of the gas-liquid phase distribution over the pipe cross section. As efficient absorption of CO_2 from the gas phase into the liquid solvent is associated with high interfacial area between the gas and the liquid, the combination of small liquid droplets, high droplet entrainment rate and homogeneous phase distribution is desired. These conditions are generally associated with high superficial mixture velocity in which annular-dispersed flow is the naturally occurring flow regime.

The modelling of the CO_2 absorption in the contactor locally obeys the same exponential decay law as shown in equation (3) above. However, as the pipe diameter is non-uniform and the interfacial area changes continuously during the contactor unit, the mole fraction of CO_2 in the gas phase at the exit $n_{G,\text{exit}}$ should be calculated by integrating along the contactor unit:

$$n_{G,\text{exit}} = n_{G,\text{inlet}} \cdot \exp \left(- \sum_{j=0}^i \frac{t_j - t_{j-1}}{\tau_j} \cdot \left(1 - \frac{n_{Lj}}{n_{L\text{max}}} \right) \right) \quad (4)$$

where the contactor is split into a total of i sections. As the contactor is short compared to the contactor pipeline and fixed in length, a more practical version of equation (4) is applied for design purposes:

$$n_{G,\text{exit}} = n_{G,\text{inlet}} \cdot (1 - x) \quad (5)$$

where x is the integral absorption efficiency for the contactor unit for the process conditions in concern. As for the time constant for the contactor pipeline, the absorption

efficiency x is determined experimentally.

Typically, per unit length, the absorption rate in the contactor by far exceeds the absorption rate in the contactor pipeline. Thus in order to design and manufacture the separation device as compactly as possible, multistage mixing, effected by installing
 5 repeated contactor units, should be considered. If this is done, $n_{G,exit}$ the mole fraction of CO_2 in the gas mixture after a total of m identical mixers will be:

$$n_{G,exit} = n_{G,inlet} \cdot (1 - x)^m \quad (6)$$

Here it is assumed that the flow conditions at the gas mixing point and through the contactor are comparable for the sequentially arranged contactors.

10 Combining the characteristics of m identical contactor units with absorption efficiency x and a contactor pipeline with characteristic time constant τ , the overall performance of the separator as used for design purposes can be described by:

$$n_G = n_{G0} \cdot (1 - x)^m \cdot \exp\left(-\frac{t}{\tau} \cdot \left(1 - \frac{n_L}{n_{Lmax}}\right)\right) \quad (7)$$

where n_{G0} now is the mole fraction CO_2 in the gas mixture at the entrance to the contactor
 15 and t is the residence time in the contactor pipeline as calculated from the superficial mixture velocity and propagated distance in the pipeline. Again, the constants x and τ are assumed to be functions of superficial mixture velocity, gas/liquid flowrate ratio, solvent mixture, system pressure and temperature.

The performance of the prediction model for the absorption in the contactor,
 20 equation (5), is tabulated in Table 1 and illustrated in figure 11. As can be seen, the maximum variation between the predicted outlet concentration of CO_2 and the experimentally measured outlet concentration of CO_2 is 0.6%.

Inlet concentration	Outlet concentration	Outlet concentration
Measured	Measured	Predicted
3.9	1.0	1.5
3.9	1.1	1.5
11.9	4.4	4.7
11.9	4.7	4.7
16.5	6.9	6.5
16.5	6.4	6.5
4.4	1.3	1.7
1.6	0.8	0.6
7.7	3.6	3.0

Table 1 – CO₂ mole fraction in gas mixture (%)

- 5 The performance of the prediction model for the absorption in the contactor pipeline, equation (3), is tabulated in Tables 2-4 and illustrated in figure 12. The tables correspond to the three different inlet concentrations of CO₂ selected, namely 2, 8 and 17%.

Position No.	SP₁	SP₂	SP₃	SP₄	SP₅
Residence time (s)	0.09	0.16	0.21	0.38	0.48
Measured concentration (%)	0.75	0.55	0.50	0.25	0.19
Predicted concentration (%)	0.75	0.59	0.49	0.28	0.19

Table 2 – Concentration v. residence time for exhaust gas with 2% initial CO₂

Position No.	SP ₁	SP ₂	SP ₃	SP ₄	SP ₅
Residence time (s)	0.09	0.16	0.21	0.38	0.48
Measured concentration (%)	3.60	3.20	2.12	1.00	0.90
Predicted concentration (%)	3.60	2.83	2.35	1.32	0.92

Table 3 – Concentration v. residence time for exhaust gas with 8% initial CO₂

Position No.	SP ₁	SP ₂	SP ₃	SP ₄
Residence time (s)	0.09	0.16	0.21	0.38
Measured concentration (%)	6.40	4.70	2.40	1.80
Predicted concentration (%)	6.40	4.32	2.55	1.83

5

Table 4 – Concentration v. residence time for exhaust gas with 17% initial CO₂

The first measured point, at approximately 0.08s, is taken as the inlet concentration of CO₂ to the pipeline in equation (3). Hence, the predicted and measured values are set to be equal. The same time constant $\tau = 0.29\text{s}$ has been applied for all three cases. You will see that the predicted values and the measured values are very similar (see figure 12).

It will be apparent to a person skilled in the art that the above results are not dependent upon the gas to be absorbed or on the solvent used to absorb that gas. Therefore it is clear that the above method of selective transfer of a gas from a mixture of gases to a liquid solvent for that gas is applicable to any gas and any respective solvent.

Claims:

1. A method of removing acid gas components from a gas mixture which comprises: bringing the gas mixture into contact with a liquid solvent or reagent for the acid gases in a first turbulent contactor; subjecting the gas mixture and liquid to turbulent
5 mixing conditions in the first contactor thereby causing the acid gas to be absorbed by the solvent or reagent; passing the fluid mixture into a second turbulent contactor; subjecting the fluid mixture to further turbulent mixing conditions in the second contactor, thereby causing further acid gas to be absorbed by the solvent or reagent; and optionally separating a gas and liquid phase.
10
2. A method as claimed in Claim 1, in which the fluid mixture is separated into a gas phase and a liquid phase between the two contactors.
3. A method as claimed in Claim 1 or Claim 2, in which the method is carried out
15 as a continuous process with the gas mixture and liquid flowing co-currently.
4. A method as claimed in Claim 3, in which the first turbulent mixing is conducted in a turbulent contactor comprising a vessel having a gas inlet, a liquid inlet, an outlet leading to a venturi passage, and a tube extending from the outlet back into the vessel.
20
5. A method as claimed in Claim 4, in which the tube is spaced from the periphery of the outlet.
6. A method as claimed in Claim 4 or Claim 5, in which the tube is a perforated
25 tube.
7. A method as claimed in Claim 4, in which the tube is a perforated tube arranged so that all the fluid which passes through the outlet does so by way of the tube.
- 30 8. A method as claimed in any of Claims 4 to 7, in which the gas mixture is supplied to the tube and the liquid is supplied to the vessel, whereby the gas mixture

draws the liquid into the venturi and the two phases are mixed.

9. A method as claimed in any of Claims 4 to 7, in which the gas mixture is supplied to the vessel and the liquid is supplied to the tube, whereby the gas is drawn
5 into the venturi by the liquid and the two phases are mixed.

10. A method as claimed in any of Claims 4 to 7, in which the liquid and the gas mixture are supplied to the vessel, the liquid being supplied to a level above the level of the outlet, whereby the gas is forced out through the outlet via the tube, thereby drawing
10 the liquid into the venturi so that the two phases are mixed.

11. A method as claimed in Claim 3, in which the first turbulent mixing is conducted in a jet pump.

15 12. A method as claimed in any preceding Claim, in which the second turbulent mixing is conducted in a turbulent contactor comprising at least one fluid inlet, an outlet leading to a venturi passage, and a tube extending from the outlet back into the contactor.

13. A method as claimed in Claim 12, in which the second turbulent contactor has a
20 separate liquid inlet and a gas inlet.

14. A method as claimed in Claim 12 or Claim 13, in which the second contactor is located in a pipe extending from the venturi section of the first contactor.

25 15. A method as claimed in any of Claims 2 to 14, in which the phase separation between the contactors occurs in an annular flow generator.

16. A method as claimed in any preceding Claim, in which fresh liquid solvent or reagent is added to the second turbulent contactor.

30

17. A method for effecting mass transfer between a first fluid and a second fluid, in

which the first fluid includes a plurality of components and the second fluid includes a solvent or a reagent for one or more selected components of the first fluid, one fluid being in the gaseous phase, the other being in the liquid phase, the method comprising: subjecting the two fluids to turbulent mixing, thereby forming a homogeneous mixture, allowing a selected component to be absorbed by a respective solvent or reagent in the second fluid; passing the fluid mixture into a second turbulent contactor; and subjecting the fluid mixture to further turbulent mixing conditions in the second contactor, thereby allowing further absorption of a selected component by a respective solvent or reagent in the second fluid.

10

18. A method as claimed in Claim 17, in which the fluid mixture is separated into a gas phase and a liquid phase between the two contactors.

15

19. A method as claimed in Claim 17 or Claim 18, in which a plurality of components are absorbed, either by a common solvent or reagent, or by respective solvents or reagents.

20. A method as claimed in any of Claims 17 to 19, in which the first fluid is a gas mixture and the second fluid is in the liquid phase.

20

21. A method as claimed in any of Claims 17 to 19, in which the first fluid is a liquid mixture or a liquid solution and the second fluid is in the gas phase.

25

22. A method for removing one or more selected gas components from a gas stream which comprises: bringing the gas stream into contact with a liquid including a solvent or a reagent for a selected component in a first turbulent contactor; subjecting the gas stream and the liquid to turbulent mixing conditions in the contactor thereby causing a selected gas component to be absorbed by a respective solvent or reagent in the liquid; passing the fluid mixture into a second turbulent contactor; and subjecting the fluid mixture to further turbulent mixing conditions in the second contactor, thereby causing further absorption of the same selected gas component, or absorption of another selected

30

gas component, by a respective solvent or reagent.

23. A method as claimed in Claim 22, in which the fluid mixture is separated into a gas phase and a liquid phase between the two contactors.

5

24. A method as claimed in Claim 22 or Claim 23, in which the method is carried out as a continuous process with the gas stream and liquid flowing co-currently.

25. A method as claimed in Claim 24, in which the first turbulent mixing is
10 conducted in a turbulent contactor comprising a vessel having a gas inlet, a liquid inlet, an outlet leading to a venturi passage, and a tube extending from the outlet back into the vessel.

26. A method as claimed in Claim 25, in which the tube is spaced from the periphery
15 of the outlet.

27. A method as claimed in Claim 25 or Claim 26, in which the tube is a perforated tube.

20 28. A method as claimed in Claim 25, in which the tube is a perforated tube arranged so that all the fluid which passes through the outlet does so by way of the tube.

29. A method as claimed in any of Claims 25 to 28, in which the gas mixture is supplied to the tube and the liquid is supplied to the vessel, whereby the gas mixture
25 draws the liquid into the venturi and the two phases are mixed.

30. A method as claimed in any of Claims 25 to 28, in which the gas mixture is supplied to the vessel and the liquid is supplied to the tube, whereby the gas is drawn into the venturi by the liquid and the two phases are mixed.

30

31. A method as claimed in any of Claims 25 to 28, in which the liquid and the gas

mixture are supplied to the vessel, the liquid being supplied to a level above the level of the outlet, whereby the gas is forced out through the outlet via the tube, thereby drawing the liquid into the venturi so that the two phases are mixed.

5 32. A method as claimed in Claim 24, in which the first turbulent mixing is conducted in a jet pump.

33. A method as claimed in any of Claims 22 to 32, in which the second turbulent mixing is conducted in a turbulent contactor comprising at least one fluid inlet, an outlet
10 leading to a venturi passage, and a tube extending from the outlet back into the contactor.

34. A method as claimed in Claim 33, in which the second turbulent contactor has a separate liquid inlet and a gas inlet.

15 35. A method as claimed in Claim 33 or Claim 34, in which the second contactor is located in a pipe extending from the venturi section of the first contactor.

36. A method as claimed in any of Claims 23 to 35, in which the phase separation between the contactors occurs in an annular flow generator.

20

37. A method as claimed in any of Claims 22 to 36, in which fresh liquid solvent is added to the second turbulent contactor.

38. A method as claimed in any of Claims 22 to 37, further comprising: cooling the
25 mixture after the second turbulent mixing; separating the cooled mixture into a gas phase and a liquid phase; removing the gas phase; subjecting the solvent in the liquid phase to a regeneration treatment to remove the absorbed selected gas component; and recycling the regenerated solvent-containing liquid phase to the mixture.

30 39. A method as claimed in Claim 38, in which the regeneration is carried out by heating and/or by flashing off the absorbed gas component in a flash tank.

40. A method as claimed in Claim 39, in which the post-mixing cooling and the regenerative heating are achieved, at least in part by mutual heat exchange.

5 41. A method as claimed in any of Claims 22 to 40, in which the liquid is pumped to the first turbulent contactor and thereby draws the gas mixture with it through the contactor.

42. A method as claimed in any of Claims 22 to 40, in which the gas stream is
10 conveyed to the first turbulent contactor at a high pressure and thereby draws the liquid with it through the contactor.

43. Apparatus for carrying out the method of Claim 38, comprising: a first turbulent contactor having a liquid inlet, a gas inlet and a fluid outlet; a second turbulent contactor
15 having at least one fluid inlet and a fluid outlet; a cooler for the fluid stream from the fluid outlet of the second turbulent contactor; a hydrocyclone or a gravity vessel arranged to separate the cooled fluid stream into a gas phase and a liquid stream; a regenerator arranged to treat the separated liquid stream; and a recycle line arranged to convey the regenerated liquid stream to either the first or second contactor or to a reservoir tank.

20

44. Apparatus as claimed in Claim 43, including an annular flow generator between the two contactors.

45. Apparatus as claimed in Claim 43 or Claim 44, including a pump arranged to
25 supply liquid to the liquid inlet of the first contactor.

46. Apparatus as claimed in any of Claims 43 to 45, in which the regenerator is a heater and/or a flash tank.

30 47. Apparatus as claimed in any of Claims 43 to 46, in which the first turbulent contactor comprises a vessel having a gas inlet, a liquid inlet, an outlet leading to a

venturi passage, and a tube extending from the outlet back into the vessel.

48. Apparatus as claimed in Claim 47, in which the tube is spaced from the periphery of the outlet.

5

49. Apparatus as claimed in Claim 47 or Claim 48, in which the tube is a perforated tube.

50. Apparatus as claimed in Claim 47, in which the tube is a perforated tube arranged so that all the fluid which passes through the outlet does so by way of the tube.

10

51. Apparatus as claimed in any of Claims 43 to 46, in which the first turbulent contactor is a jet pump.

15

52. Apparatus as claimed in any of Claims 43 to 51, in which the second turbulent contactor comprises at least one fluid inlet, an outlet leading to a venturi passage, and a tube extending from the outlet back into the contactor.

20

53. Apparatus as claimed in Claim 52, in which the second turbulent contactor has a separate gas inlet and a liquid inlet.

54. Apparatus as claimed in Claim 52 or Claim 53, in which the second turbulent contactor is located in a pipe extending from the venturi section of the first contactor.

25

55. The use of one or more turbulent contactors for selectively absorbing one or more gas components from a gas stream, in which the gas stream is brought into contact with a liquid including solvents or reagents for the selected gas components, the absorption rate of reaction for the selected gas components being different thereby causing the selected components to be absorbed separately.

30

56. A use as claimed in Claim 55, in which a first selected component is absorbed in

a first contactor and a second selected component is absorbed in a second contactor.

57. A use as claimed in Claim 55 or Claim 56, in which the gas stream is at high pressure and the first absorption is instantaneous.

5

58. A use as claimed in any one of Claims 55 to 57, in which a first turbulent contactor comprises a gas inlet, a liquid inlet, an outlet leading to a venturi passage and a tube extending from the outlet back upstream.

10

59. A use as claimed in Claim 58, in which the tube is spaced from the periphery of the outlet.

60. A use as claimed in Claim 58 or Claim 59, in which the tube is a perforated tube.

15

61. A use as claimed in Claim 58, in which the tube is a perforated tube arranged so that all the fluid which passes through the outlet does so by way of the tube.

62. A use as claimed in any one of Claims 55 to 57, in which the first contactor is a jet pump.

20

63. A use as claimed in any of Claims 55 to 62, in which a second turbulent contactor comprises at least one fluid inlet, an outlet leading to a venturi passage, and a tube extending from the outlet back into the contactor.

25

64. A use as claimed in Claim 63, in which the second turbulent contactor has a separate gas inlet and a liquid inlet.

65. A use as claimed in Claim 63 or Claim 64, in which the second turbulent contactor is located in a pipe extending from the venturi section of the first contactor.

30

66. A use as claimed in any of Claims 55 to 65, in which a gas phase and a liquid

phase are separated after exit from a first turbulent contactor before entry into a second turbulent contactor.

67. A use as claimed in Claim 66, in which the separation occurs in an annular flow
5 separator.

AMENDED CLAIMS

[received by the International Bureau on 17 February 1999 (17.02.99);
original claims 1-67 replaced by new claims 1-28 (4 pages)]

1. A method for removing one or more selected gas components from a gas stream which comprises: bringing the gas stream into contact with a liquid including a solvent
5 or a reagent for a selected component in a first turbulent contactor; subjecting the gas stream and the liquid to turbulent mixing conditions in the contactor thereby causing a selected gas component to be absorbed by a respective solvent or reagent in the liquid; passing the fluid mixture into a second turbulent contactor; and subjecting the fluid mixture to further turbulent mixing conditions in the second contactor, thereby causing
10 further absorption of the same selected gas component, or absorption of another selected gas component, by a respective solvent or reagent; the method being a continuous process with the gas stream and liquid flowing co-currently, and at least one of the turbulent contactors comprising a vessel having a gas inlet, a liquid inlet, an outlet leading to a venturi passage, and a tube extending from the outlet back into the vessel.
15
2. A method as claimed in Claim 1, in which the tube is perforated and/or is spaced from the periphery of the outlet.
3. A method as claimed in Claim 1 or Claim 2, in which the gas mixture is supplied
20 to the tube and the liquid is supplied to the vessel, whereby the gas mixture draws the liquid into the venturi and the two phases are mixed.
4. A method as claimed in Claim 1 or Claim 2, in which the gas mixture is supplied to the vessel and the liquid is supplied to the tube, whereby the gas is drawn into the
25 venturi by the liquid and the two phases are mixed.
5. A method as claimed in Claim 1 or Claim 2, in which the liquid and the gas mixture are supplied to the vessel, the liquid being supplied to a level above the level of the outlet, whereby the gas is forced out through the outlet via the tube, thereby drawing
30 the liquid into the venturi so that the two phases are mixed.

6. A method as claimed in Claim 1, in which the first turbulent mixing is conducted in a jet pump.

7. A method as claimed in any preceding claim, in which the second contactor is
5 located in a pipe extending from the venturi section of the first contactor.

8. A method as claimed in any preceding claim, in which the fluid mixture is separated into a gas phase and a liquid phase between the two contactors, the phase separation preferably occurring in an annular flow generator.
10

9. A method as claimed in any preceding claim, in which fresh liquid solvent is added to the second turbulent contactor.

10. A method as claimed in any preceding claim, further comprising: cooling the
15 mixture after the second turbulent mixing; separating the cooled mixture into a gas phase and a liquid phase; removing the gas phase; subjecting the solvent in the liquid phase to a regeneration treatment to remove the absorbed selected gas component; and recycling the regenerated solvent-containing liquid phase to the mixture.

20 11. A method as claimed in Claim 10, in which the regeneration is carried out by heating and/or by flashing off the absorbed gas component in a flash tank.

12. A method as claimed in Claim 11, in which the post-mixing cooling and the regenerative heating are achieved, at least in part by mutual heat exchange.
25

13. A method as claimed in any preceding claim, in which the liquid is pumped to the first turbulent contactor and thereby draws the gas mixture with it through the contactor.

30 14. A method as claimed in any of Claims 1 to 12, in which the gas stream is conveyed to the first turbulent contactor at a high pressure and thereby draws the liquid

with it through the contactor.

15. Apparatus for carrying out the method of Claim 10, comprising: a first turbulent contactor having a liquid inlet, a gas inlet and a fluid outlet; a second turbulent contactor
5 having at least one fluid inlet and a fluid outlet, at least one of the turbulent contactors comprising a vessel having a gas inlet, a liquid inlet, an outlet leading to a venturi passage, and a tube extending from the outlet back into the vessel; a cooler for the fluid stream from the fluid outlet of the second turbulent contactor; a hydrocyclone or a gravity vessel arranged to separate the cooled fluid stream into a gas phase and a liquid
10 stream; a regenerator arranged to treat the separated liquid stream; and a recycle line arranged to convey the regenerated liquid stream to either the first or second contactor or to a reservoir tank.

16. Apparatus as claimed in Claim 15, including an annular flow generator between
15 the two contactors.

17. Apparatus as claimed in Claim 15 or Claim 16, including a pump arranged to supply liquid to the liquid inlet of the first contactor.

20 18. Apparatus as claimed in any of Claims 15 to 17, in which the regenerator is a heater and/or a flash tank.



19. Apparatus as claimed in any one of Claims 15 to 18, in which the tube is perforated and/or is spaced from the periphery of the outlet.
25

20. Apparatus as claimed in any of Claims 15 to 19, in which the first turbulent contactor is a jet pump.

21. Apparatus as claimed in any one of Claims 15 to 20, in which the second
30 turbulent contactor is located in a pipe extending from the venturi section of the first contactor.

22. The use of more than one turbulent contactor for selectively absorbing one or more gas components from a gas stream, in which the gas stream is brought into contact with a liquid including solvents or reagents for the selected gas components, the absorption rate of reaction for the selected gas components being different thereby causing the selected components to be absorbed separately, at least one of the turbulent contactors comprising a gas inlet, a liquid inlet, an outlet leading to a venturi passage and a tube extending from the outlet back upstream.
23. A use as claimed in Claim 22, in which a first selected component is absorbed in a first contactor and a second selected component is absorbed in a second contactor.
24. A use as claimed in Claim 22 or Claim 23, in which the gas stream is at high pressure and the first absorption is instantaneous.
25. A use as claimed in any one of Claims 22 to 24, in which the tube is perforated and/or is spaced from the periphery of the outlet.
26. A use as claimed in any one of Claims 22 to 25, in which the first contactor is a jet pump.
27. A use as claimed in any one of Claims 22 to 26, in which the second turbulent contactor is located in a pipe extending from the venturi section of the first contactor.
28. A use as claimed in any one of Claims 22 to 27, in which a gas phase and a liquid phase are separated after exit from a first turbulent contactor before entry into a second turbulent contactor, the phase separation preferably occurring in an annular flow generator.

1 / 11

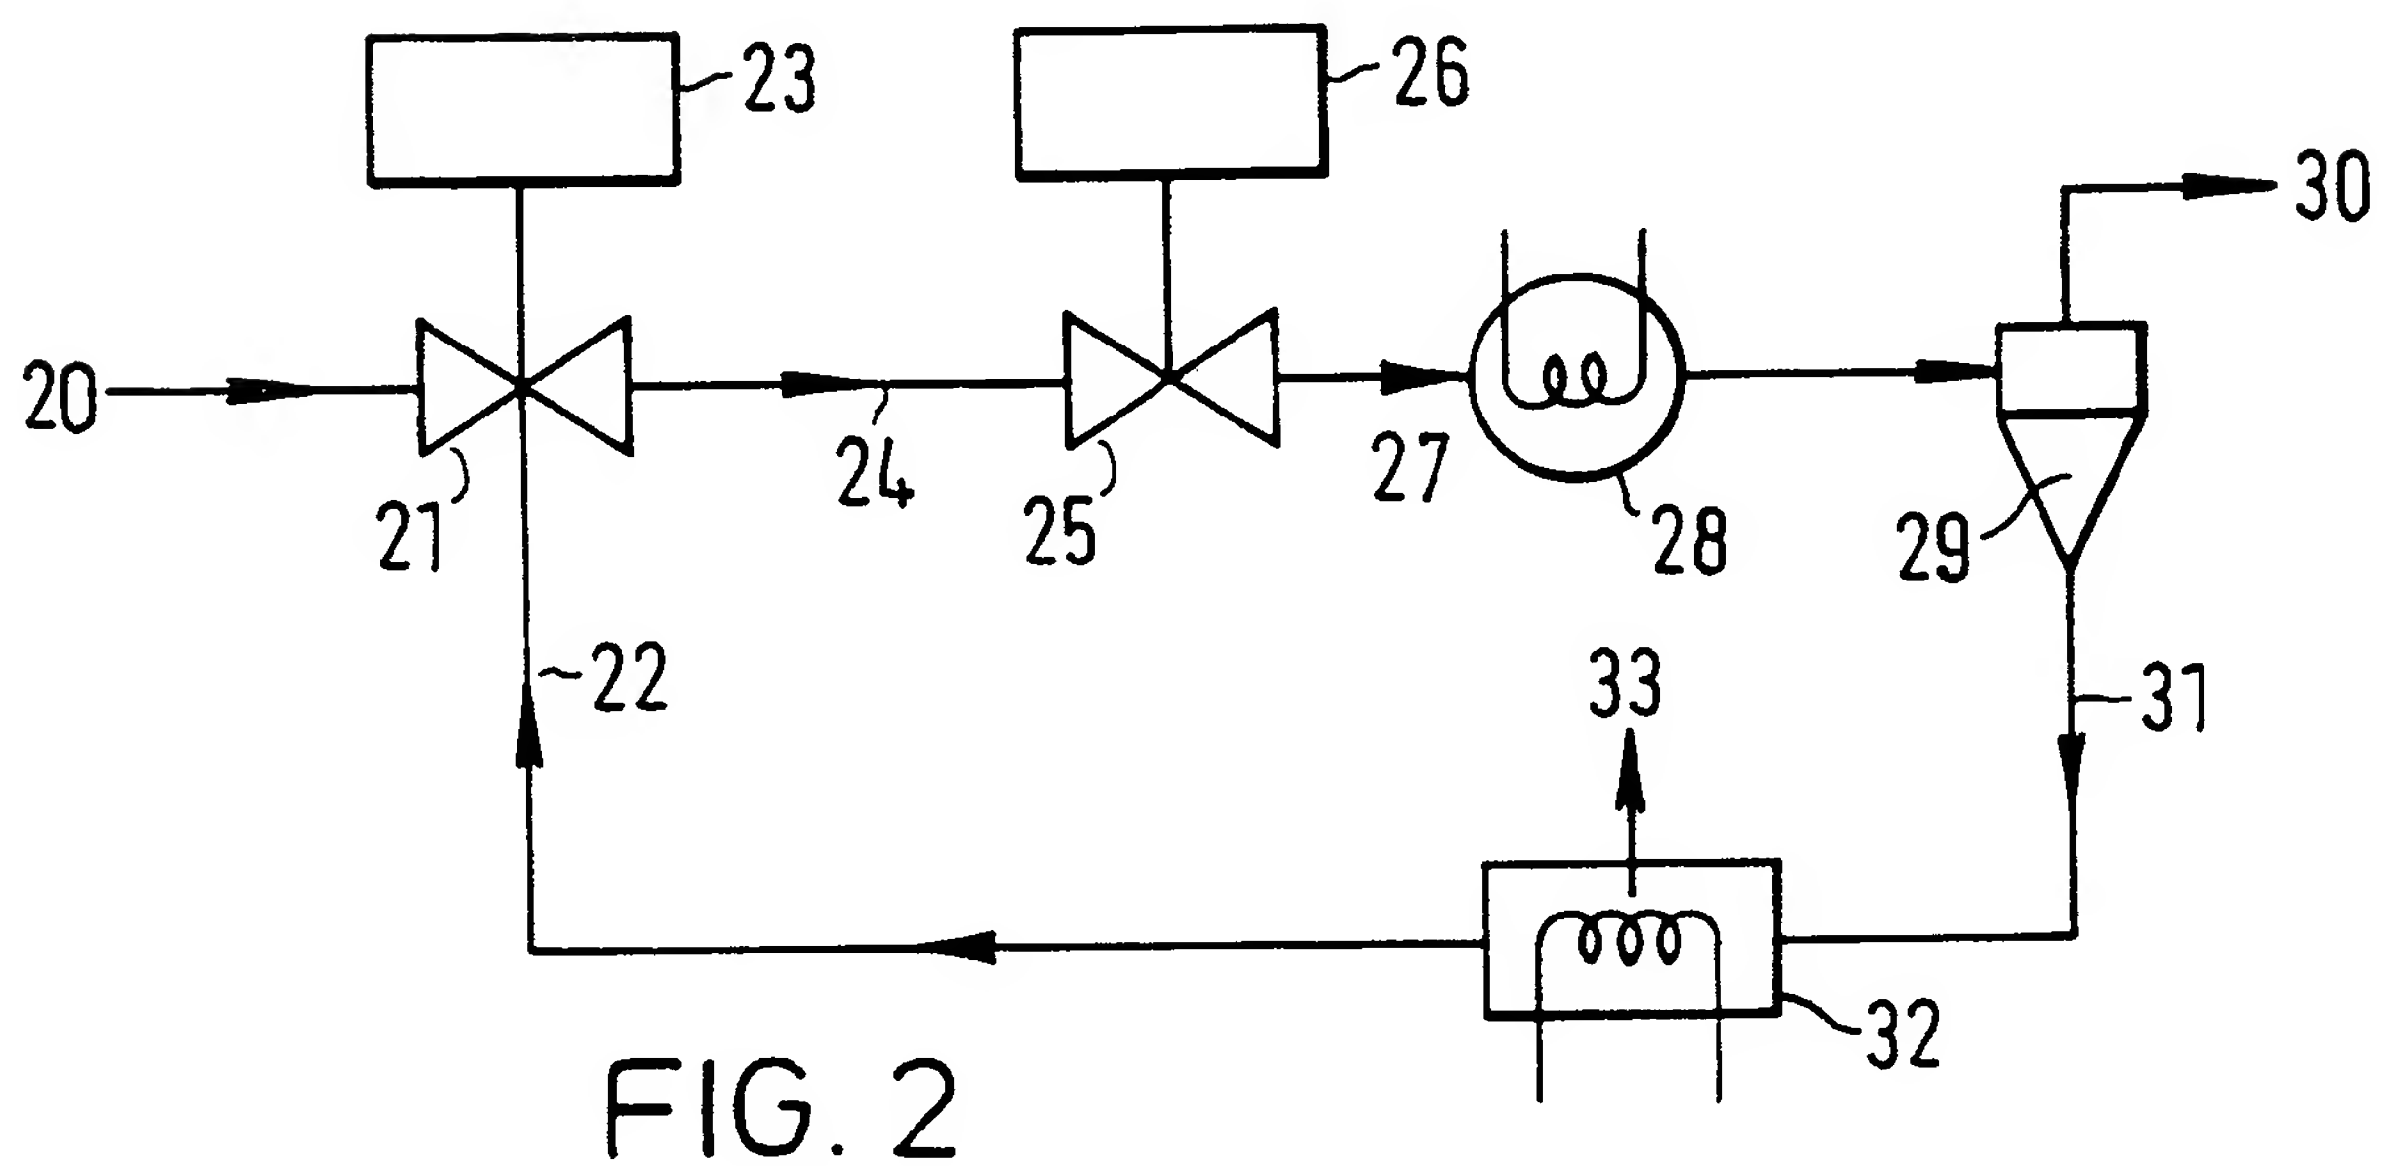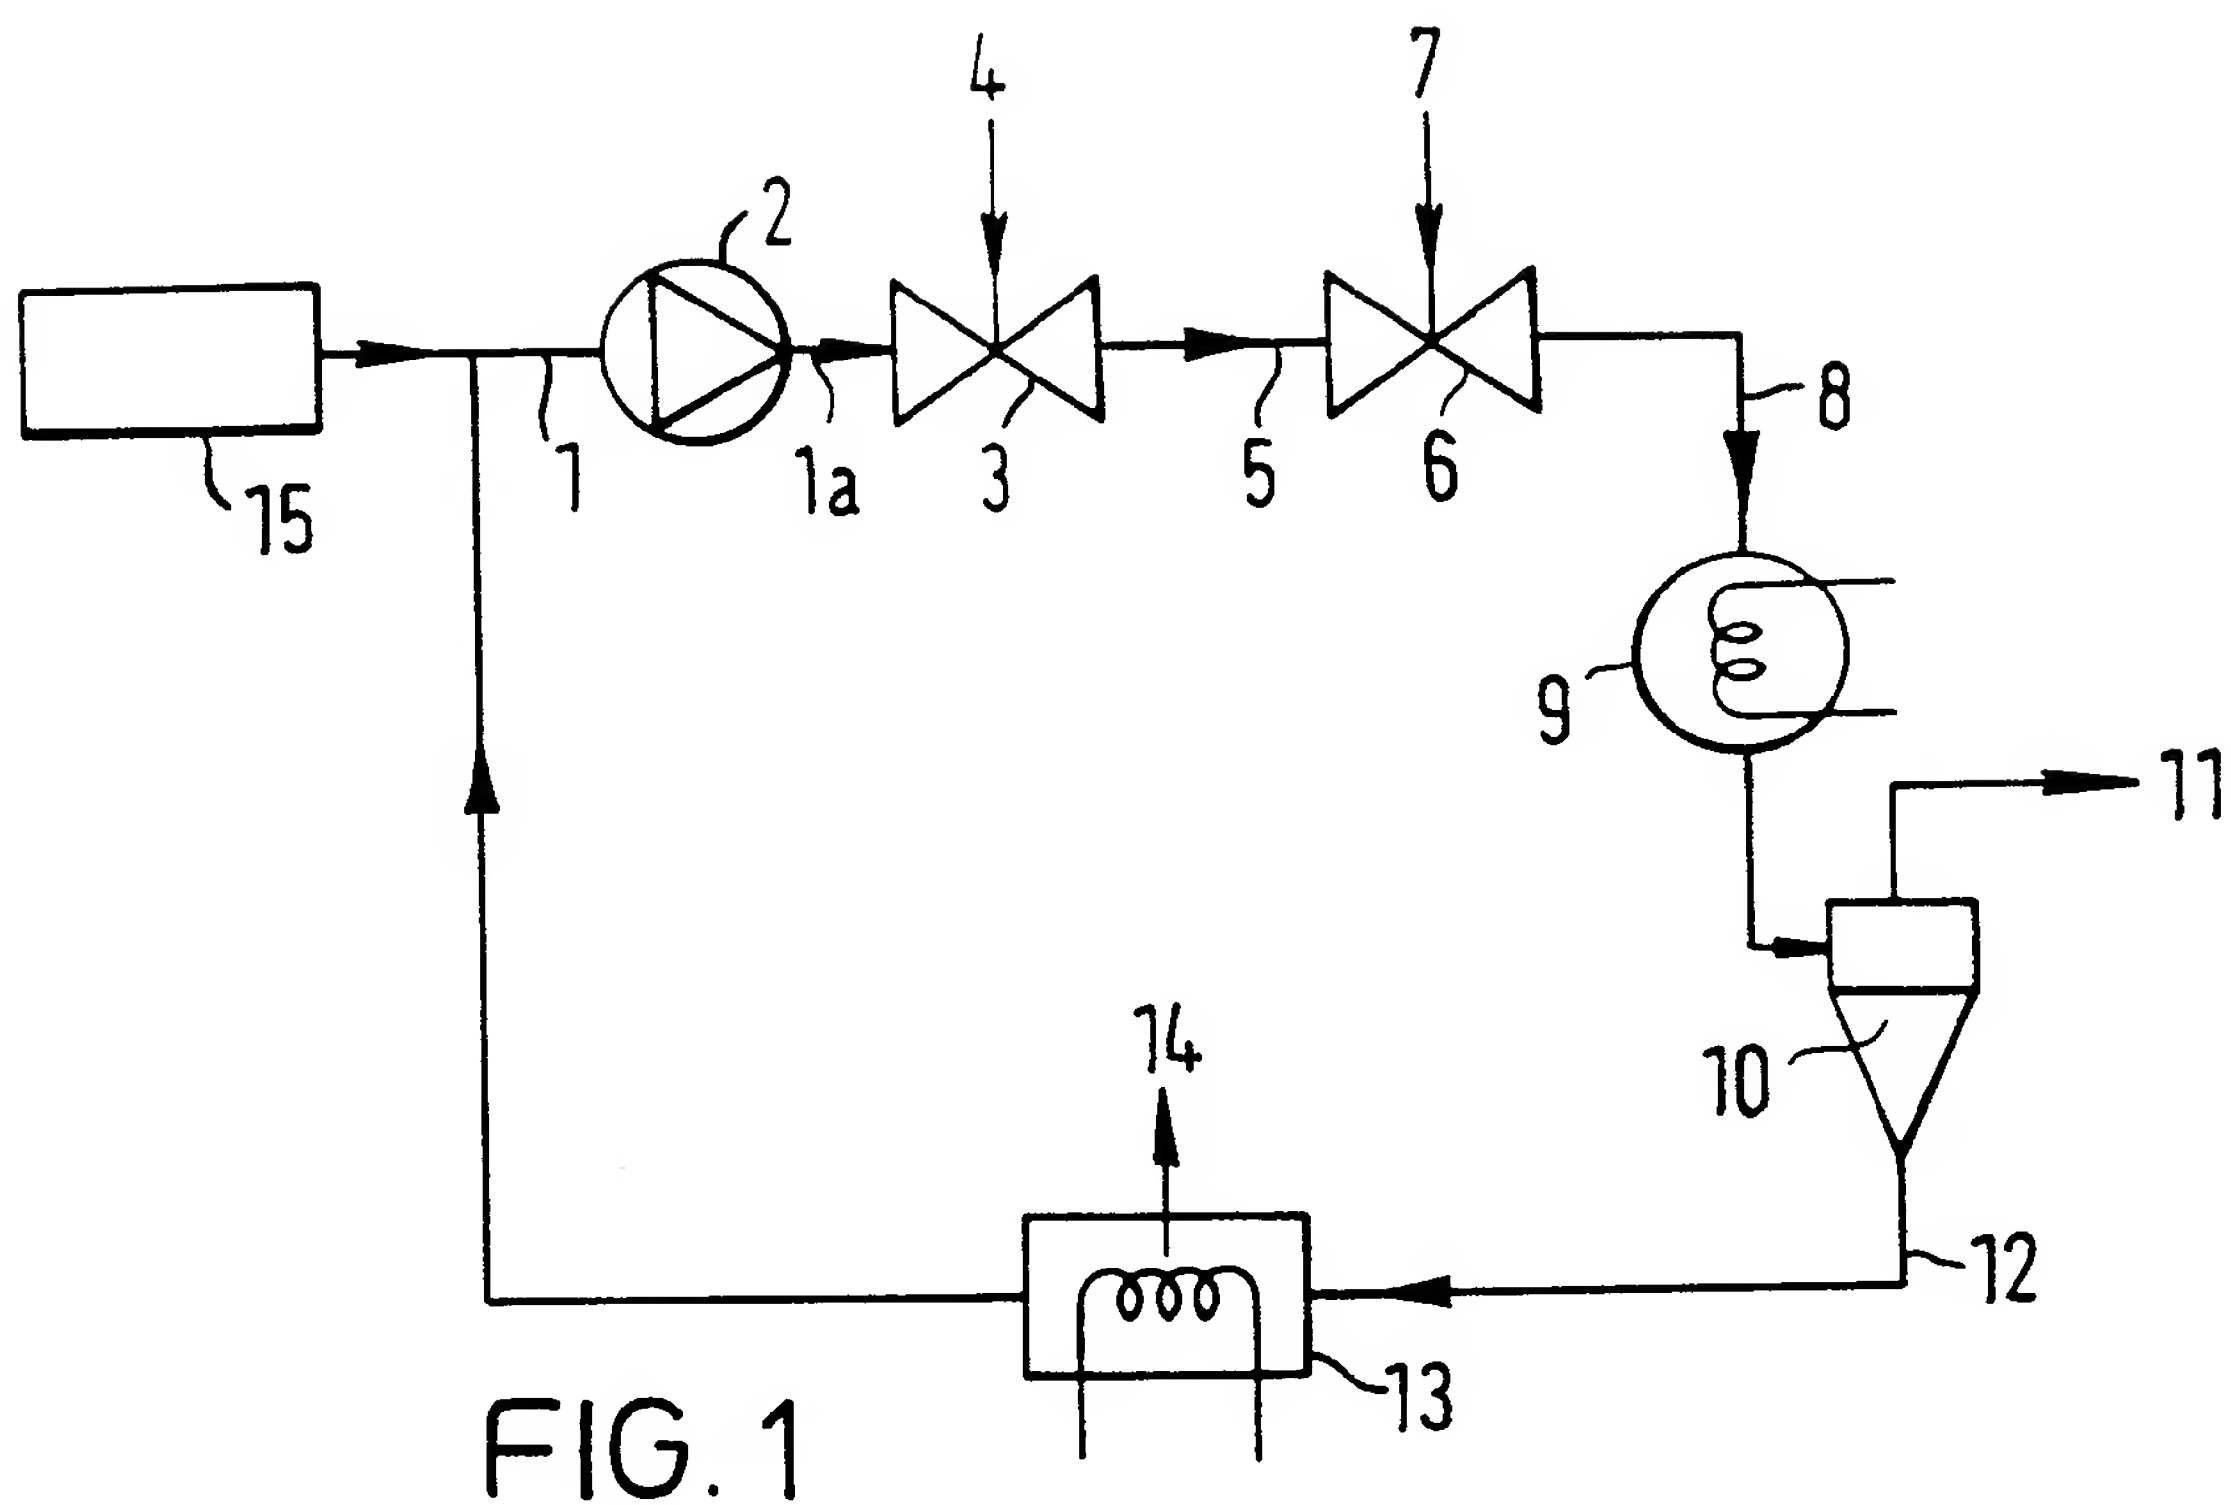

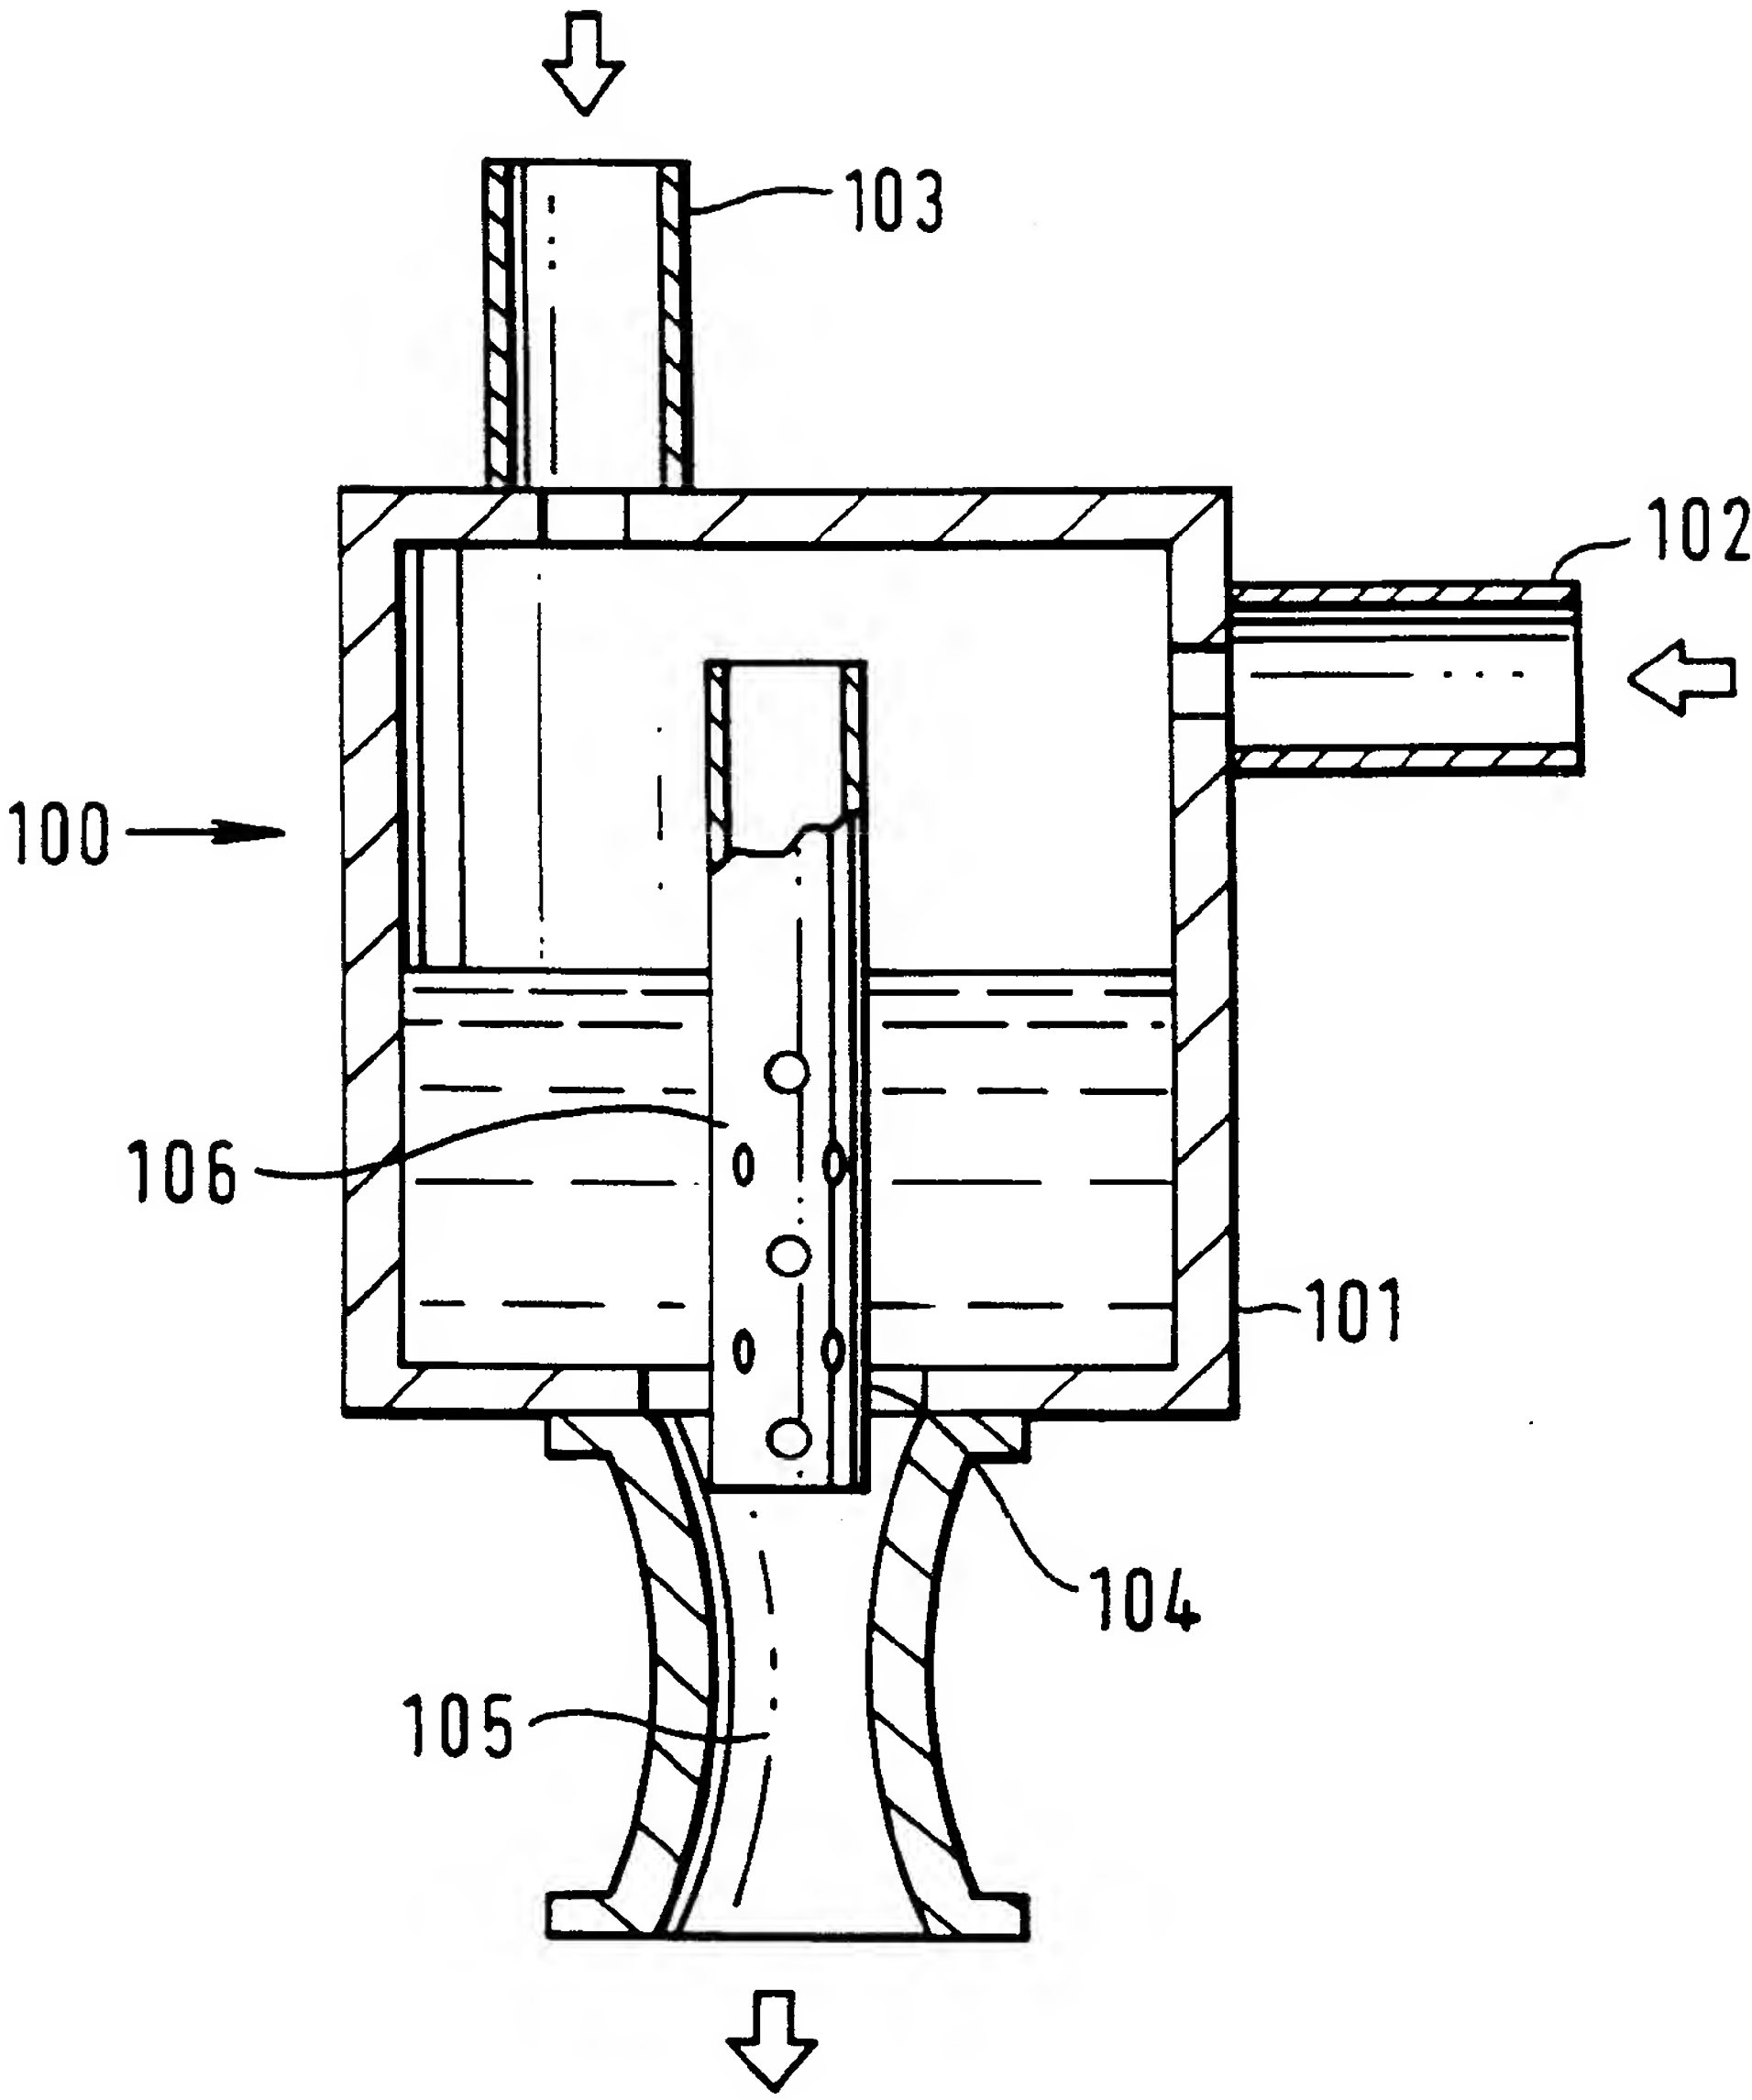
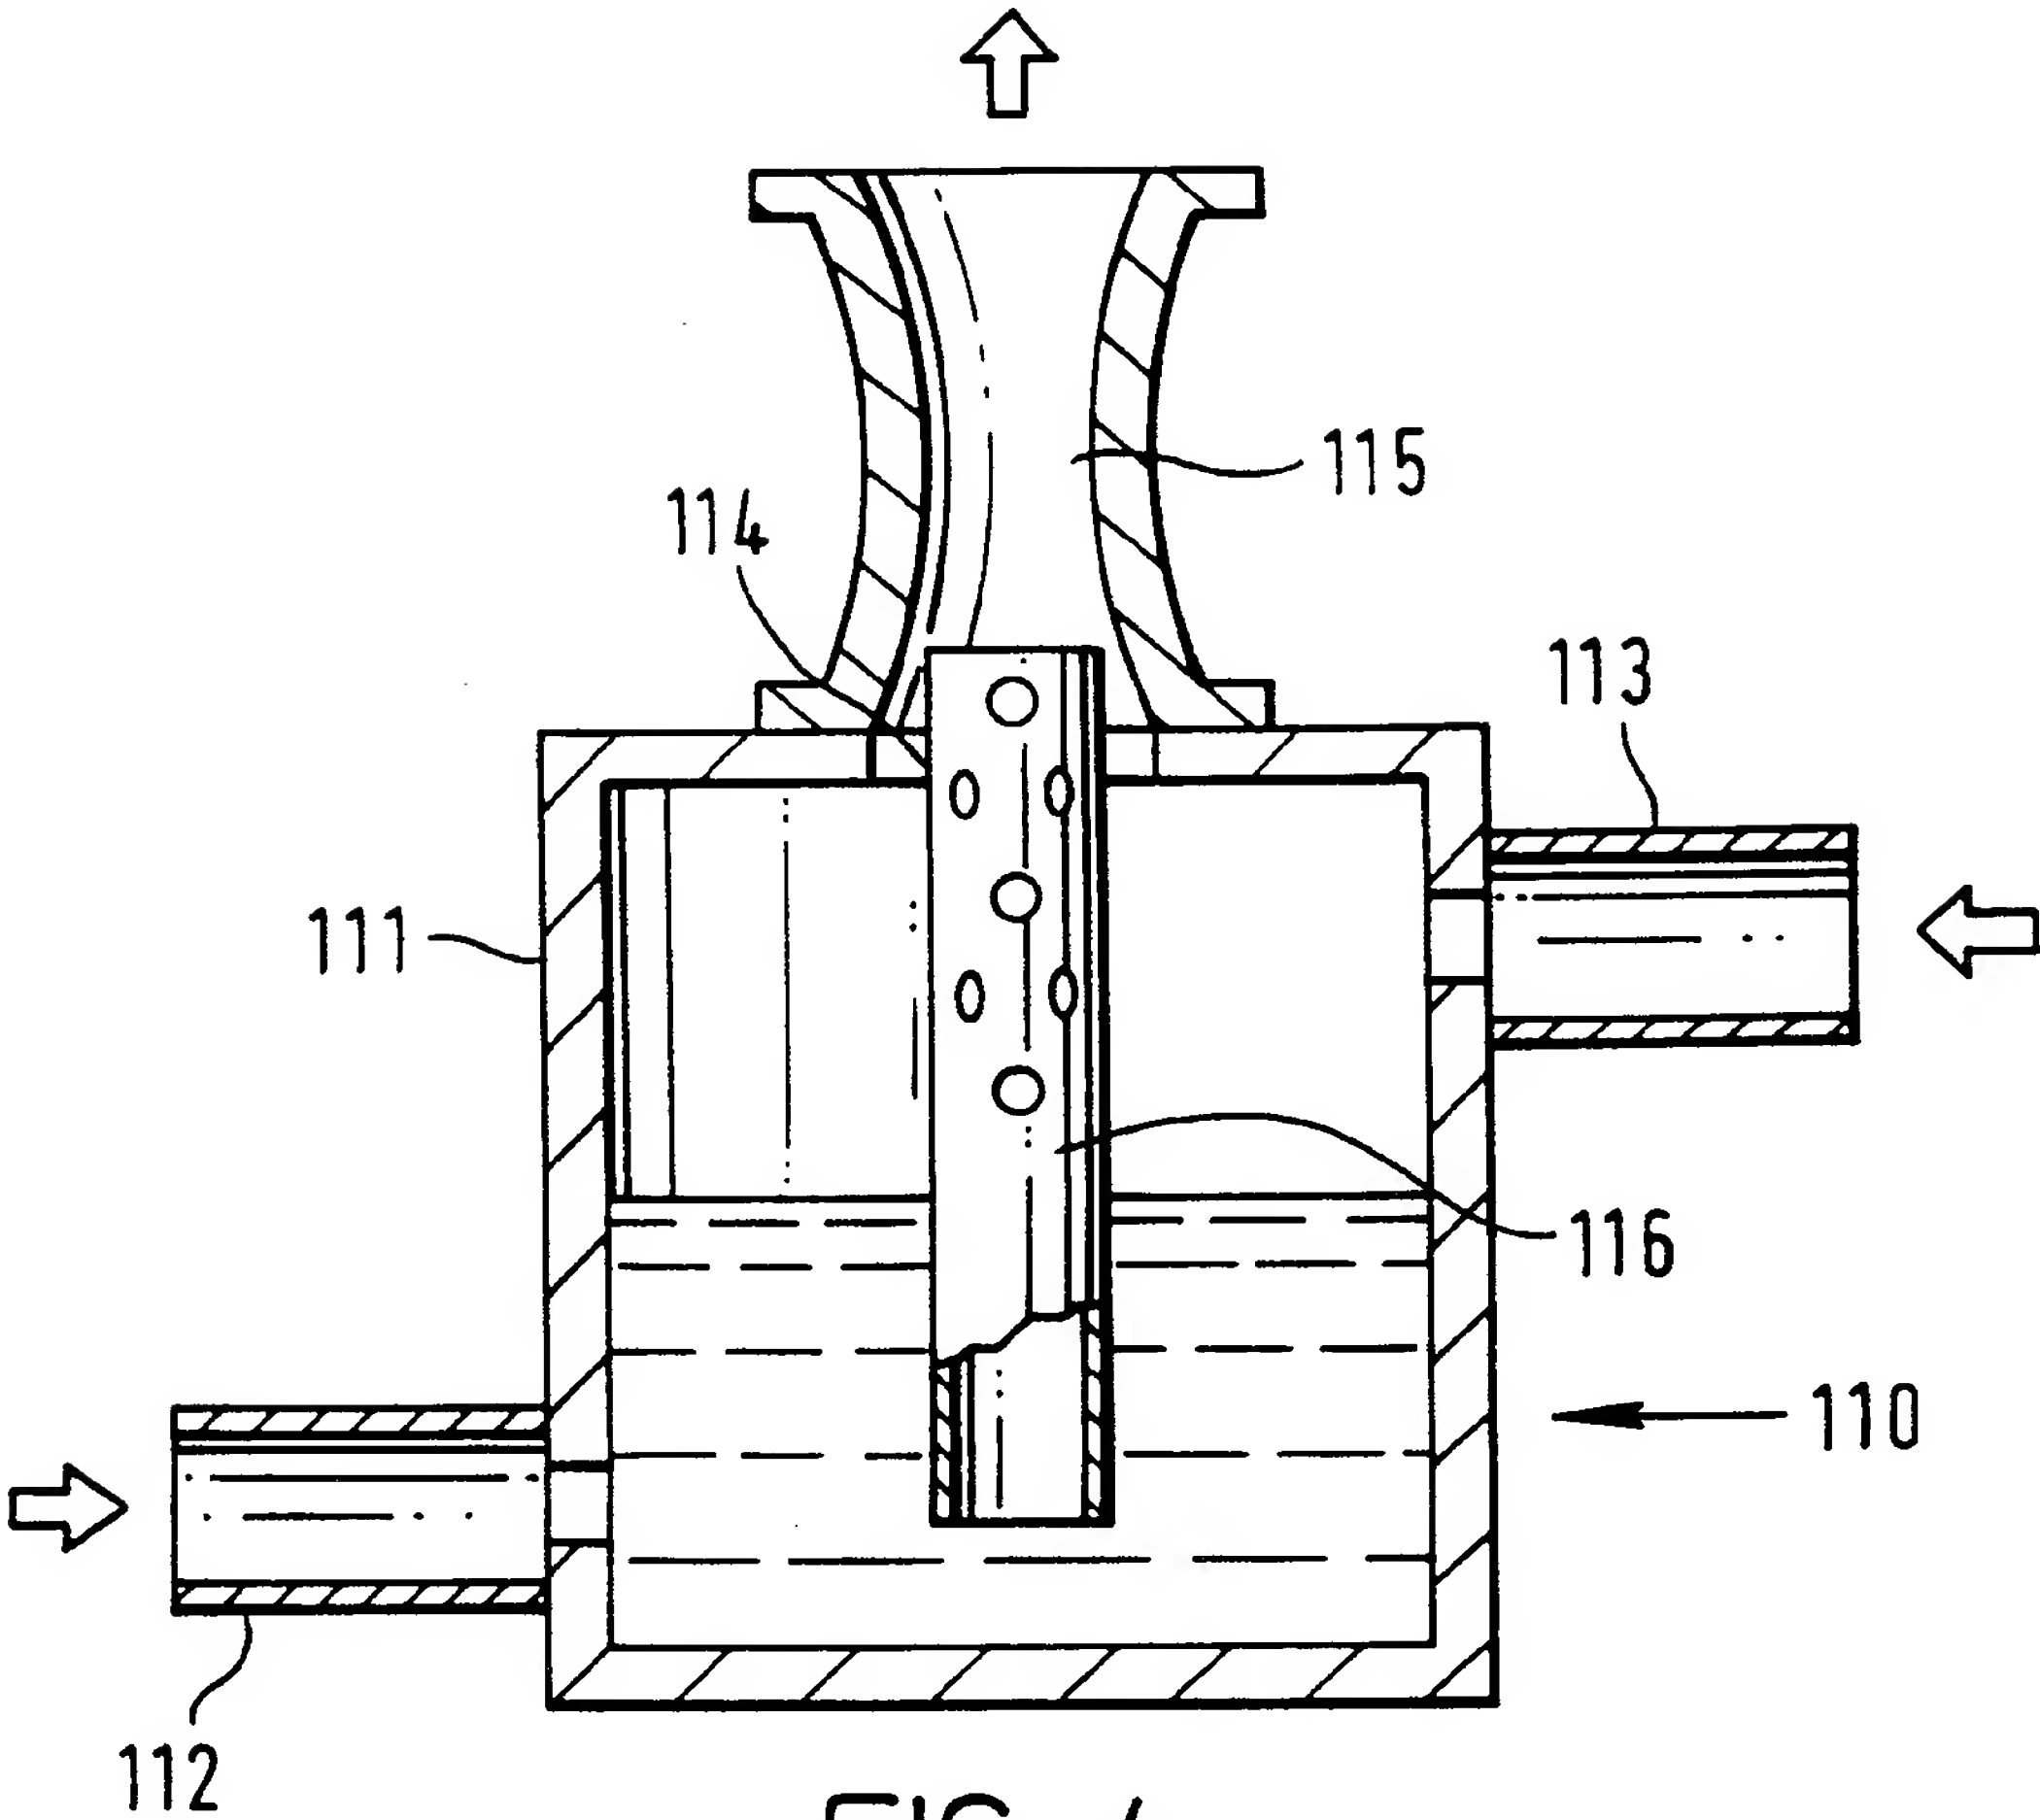


FIG. 3



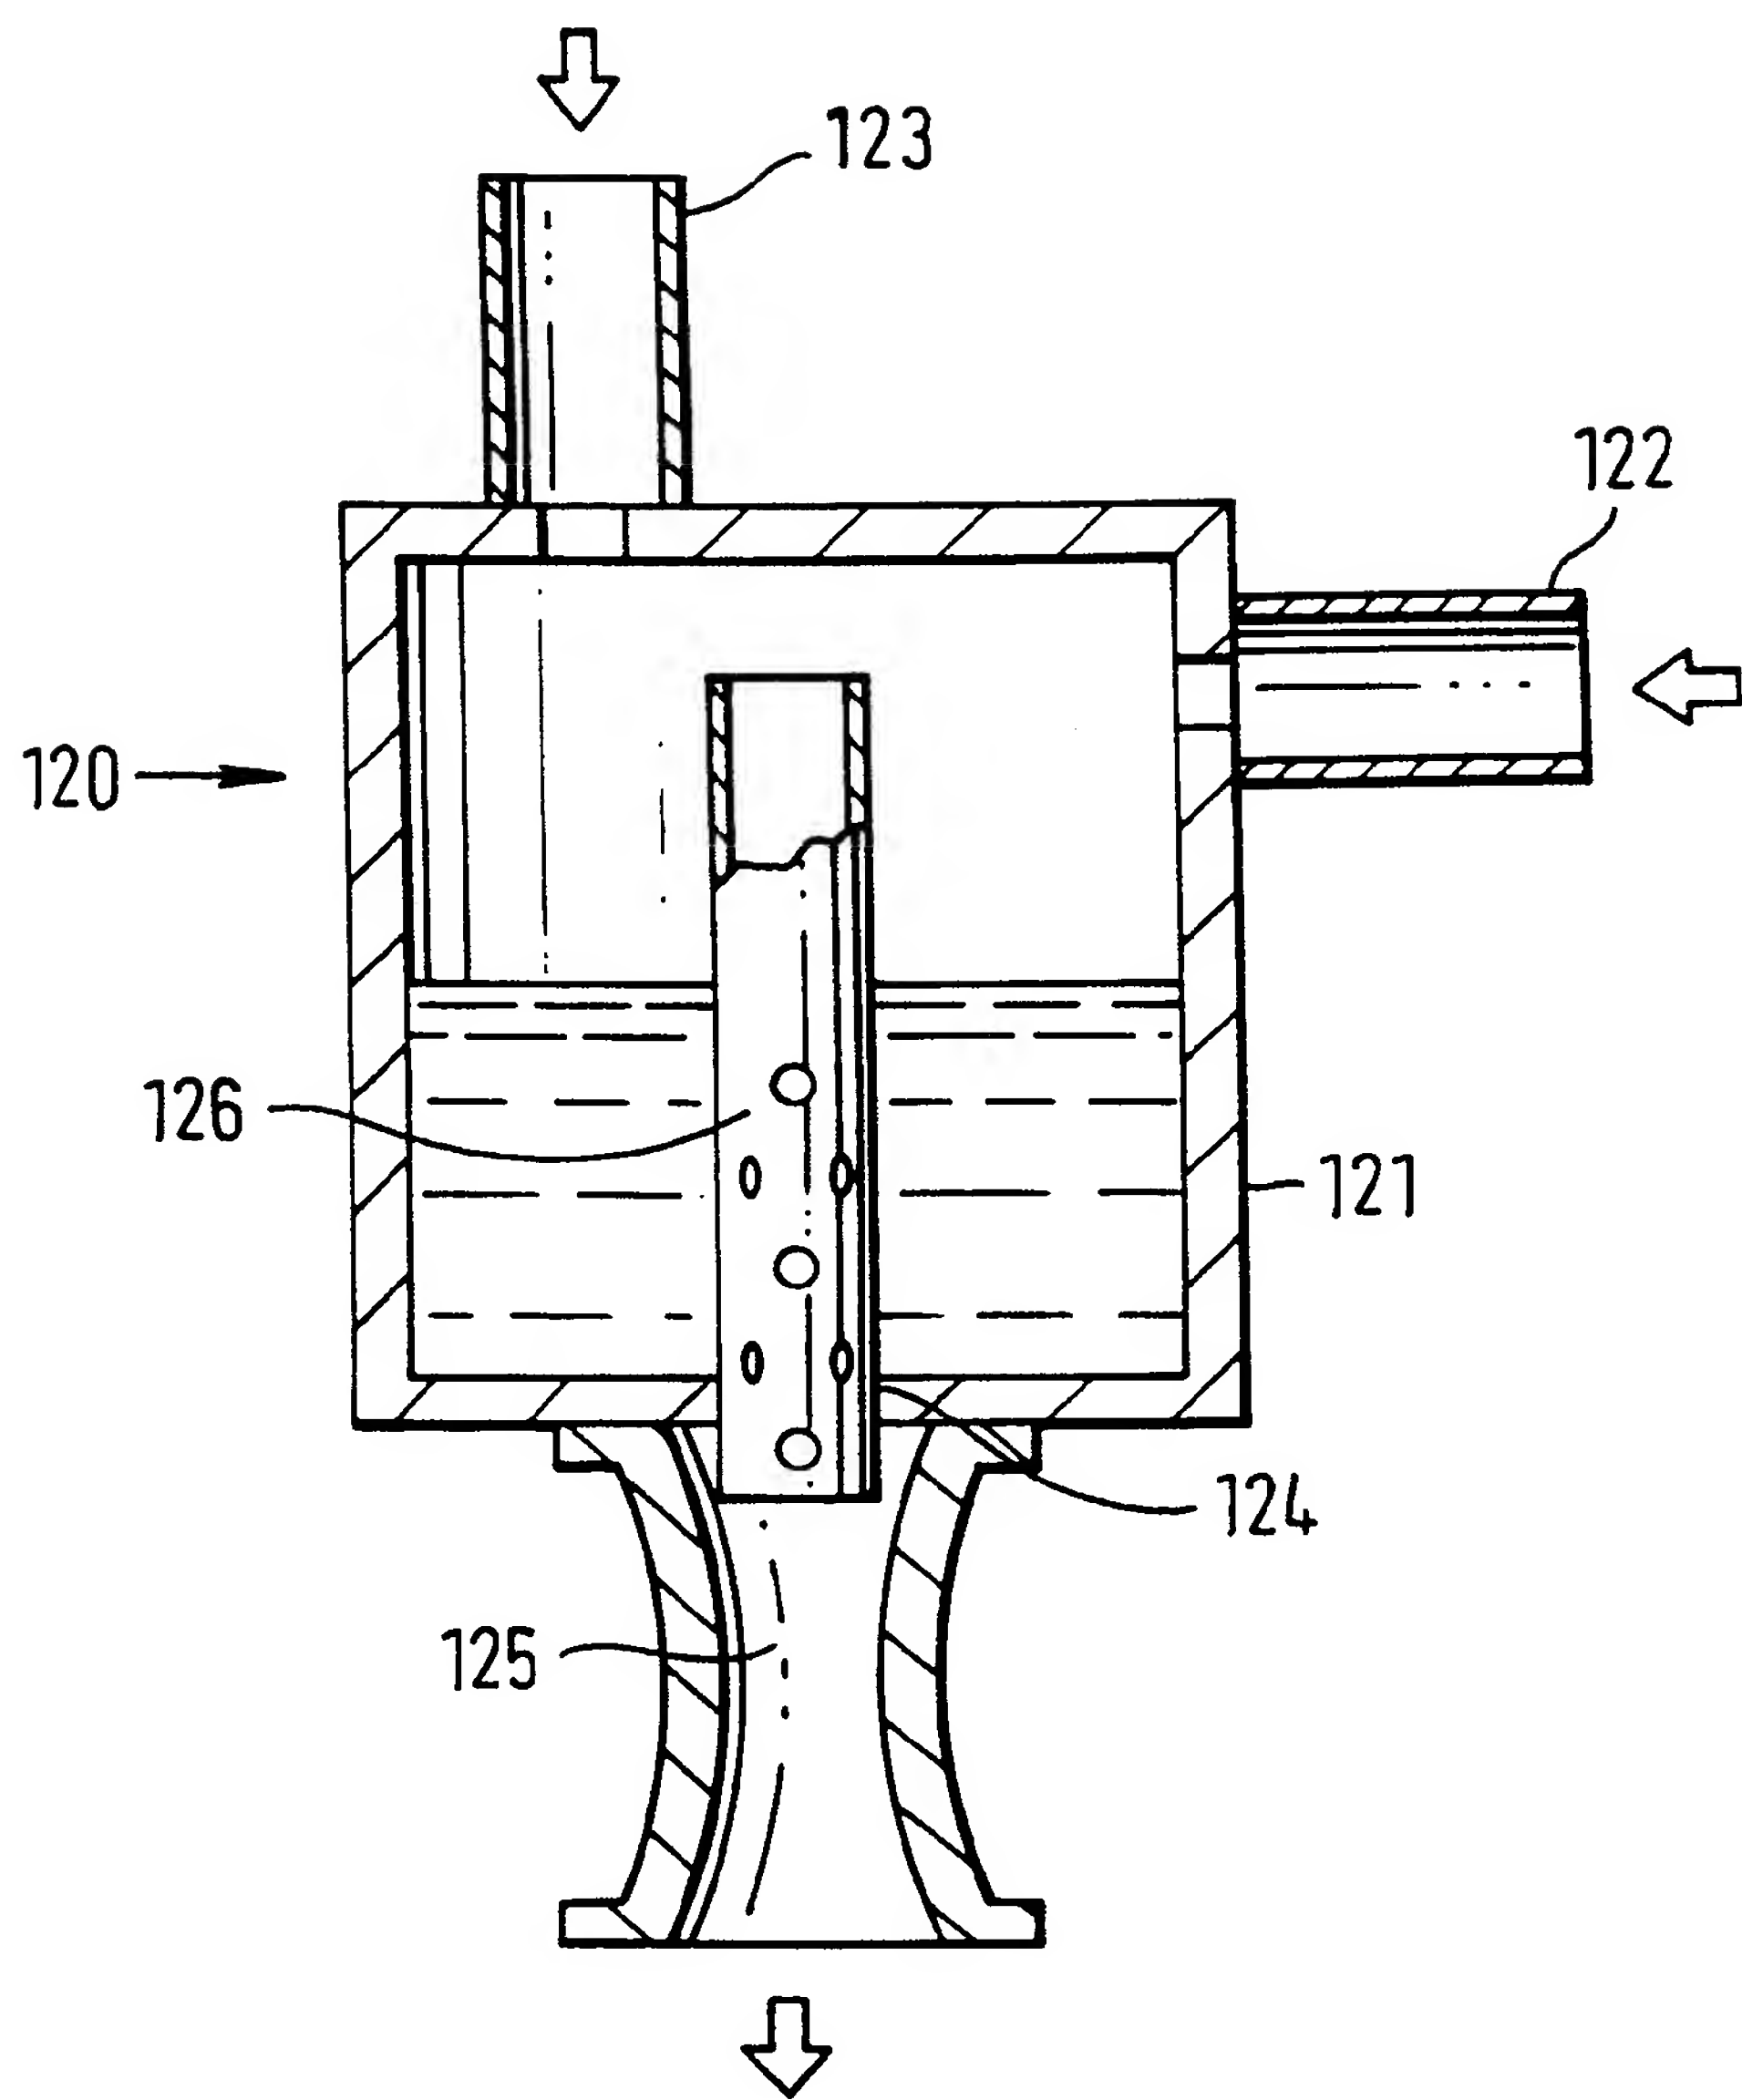


FIG. 5

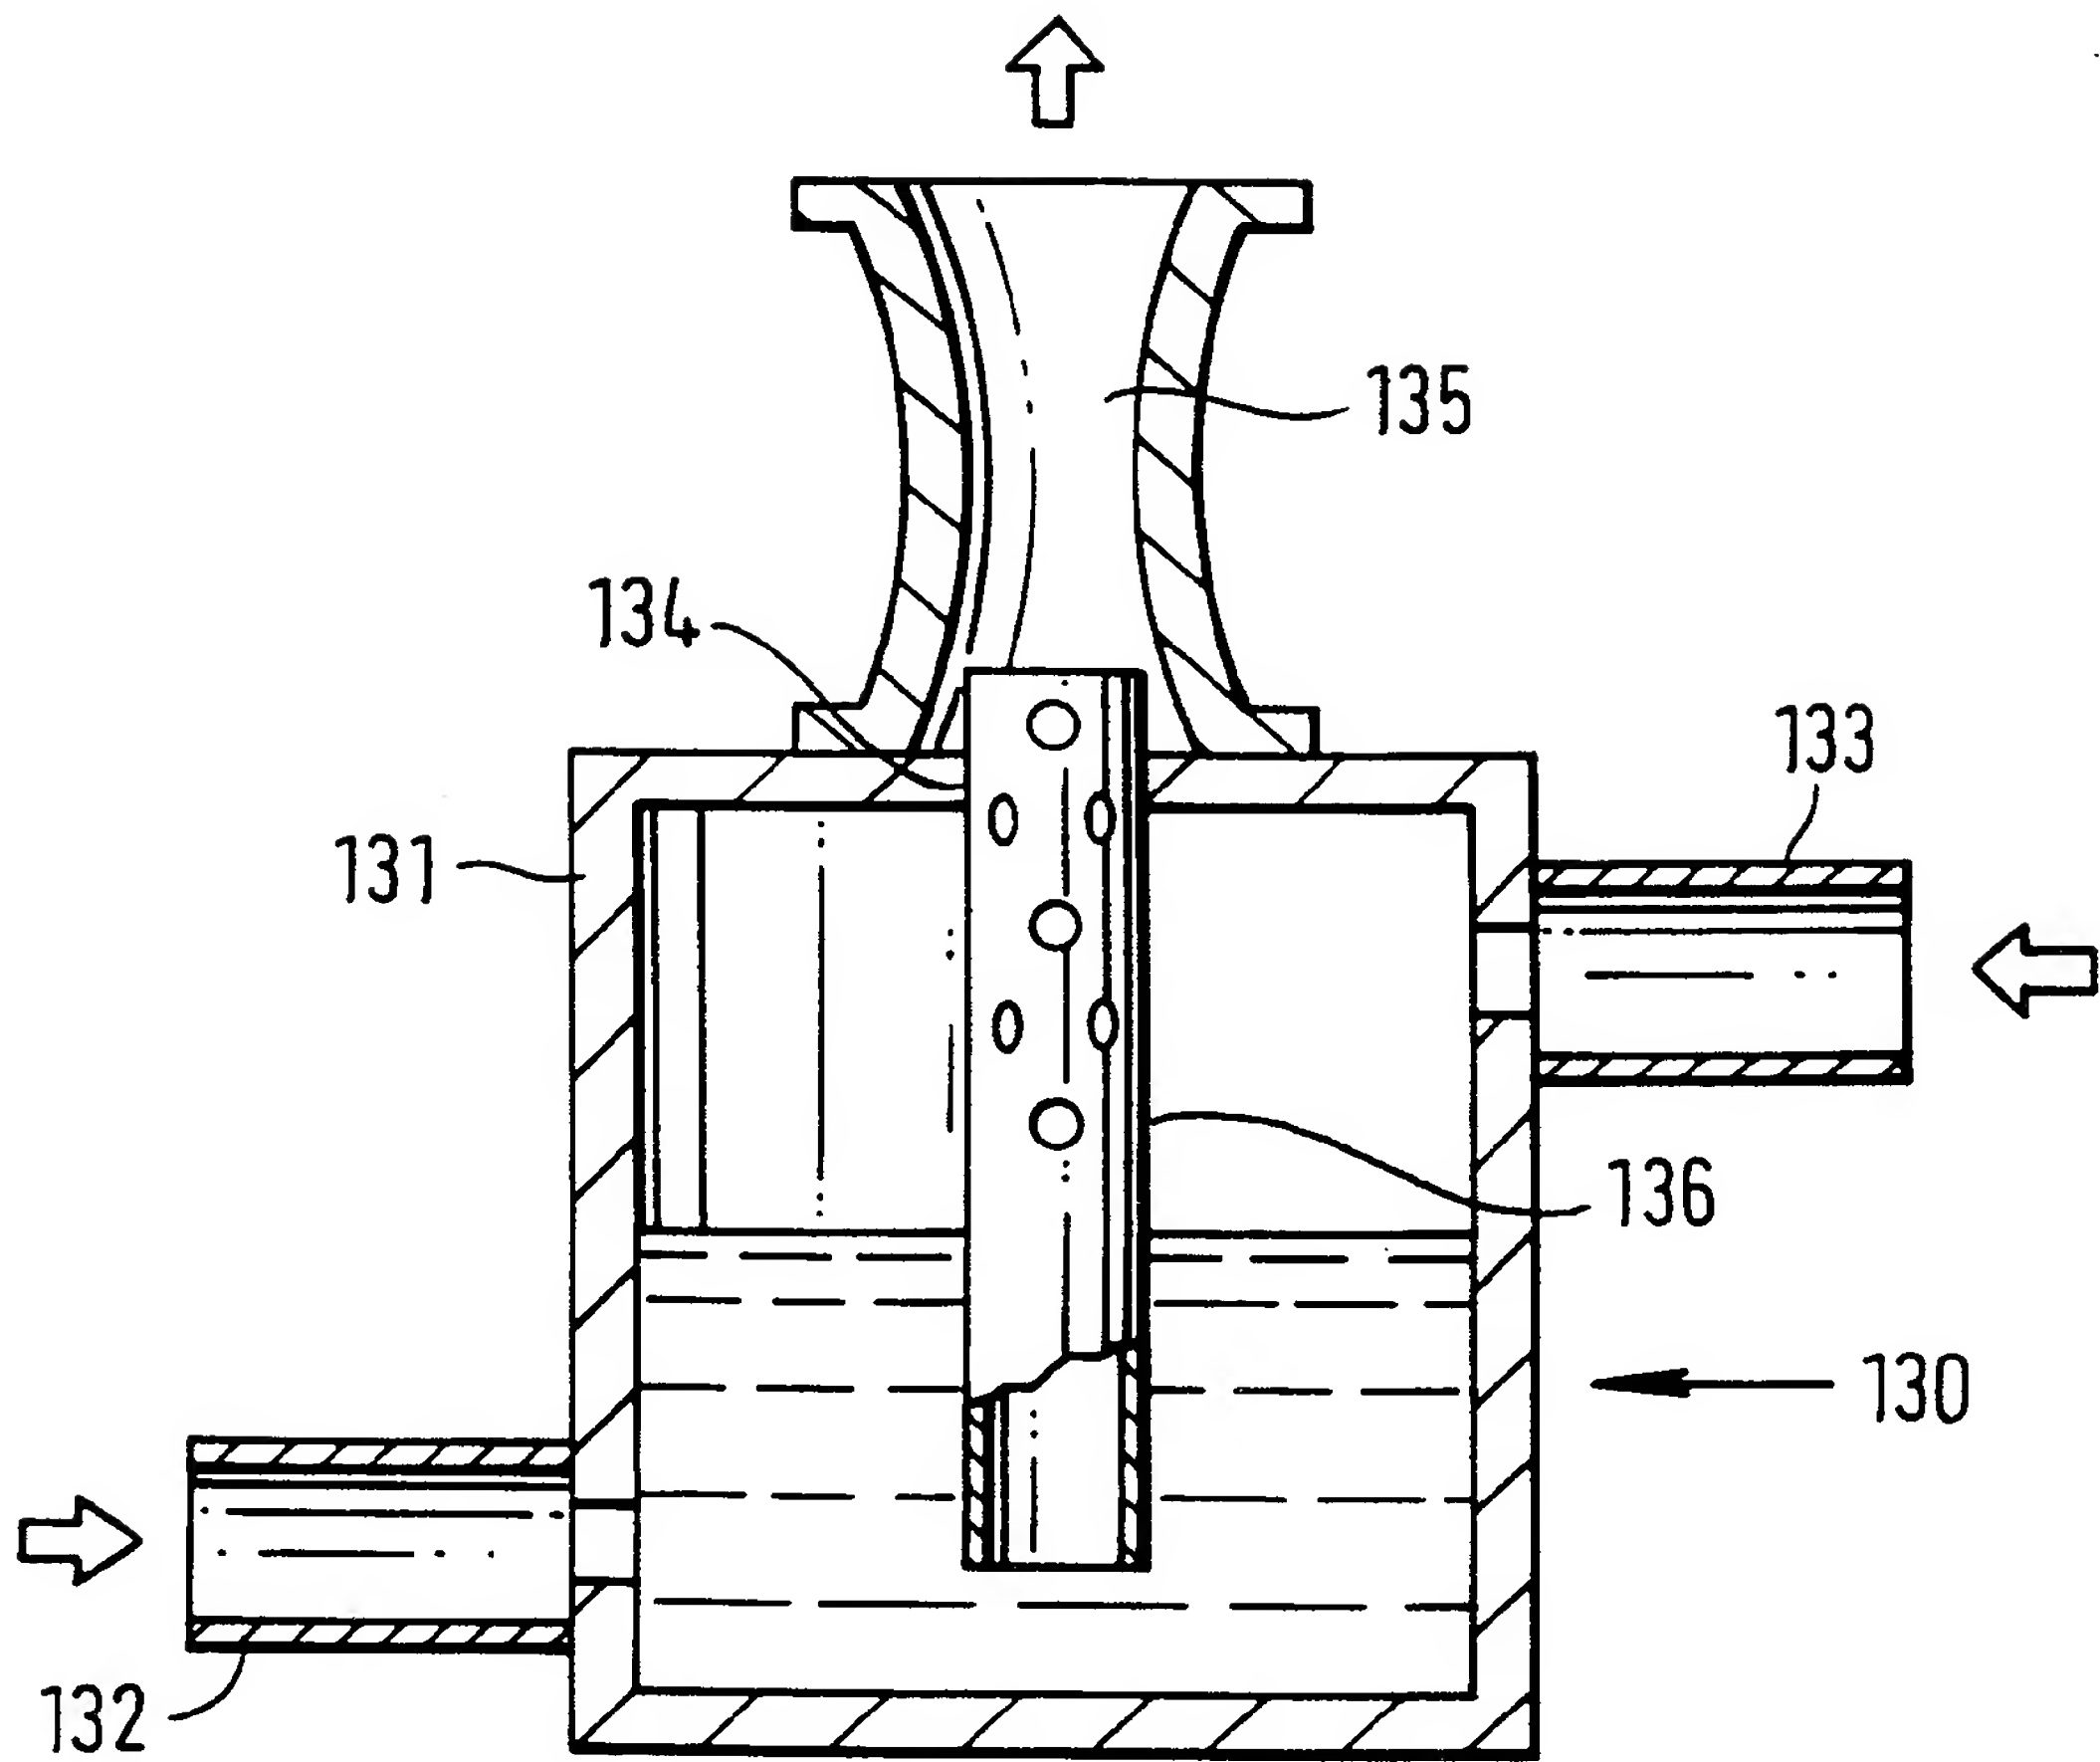
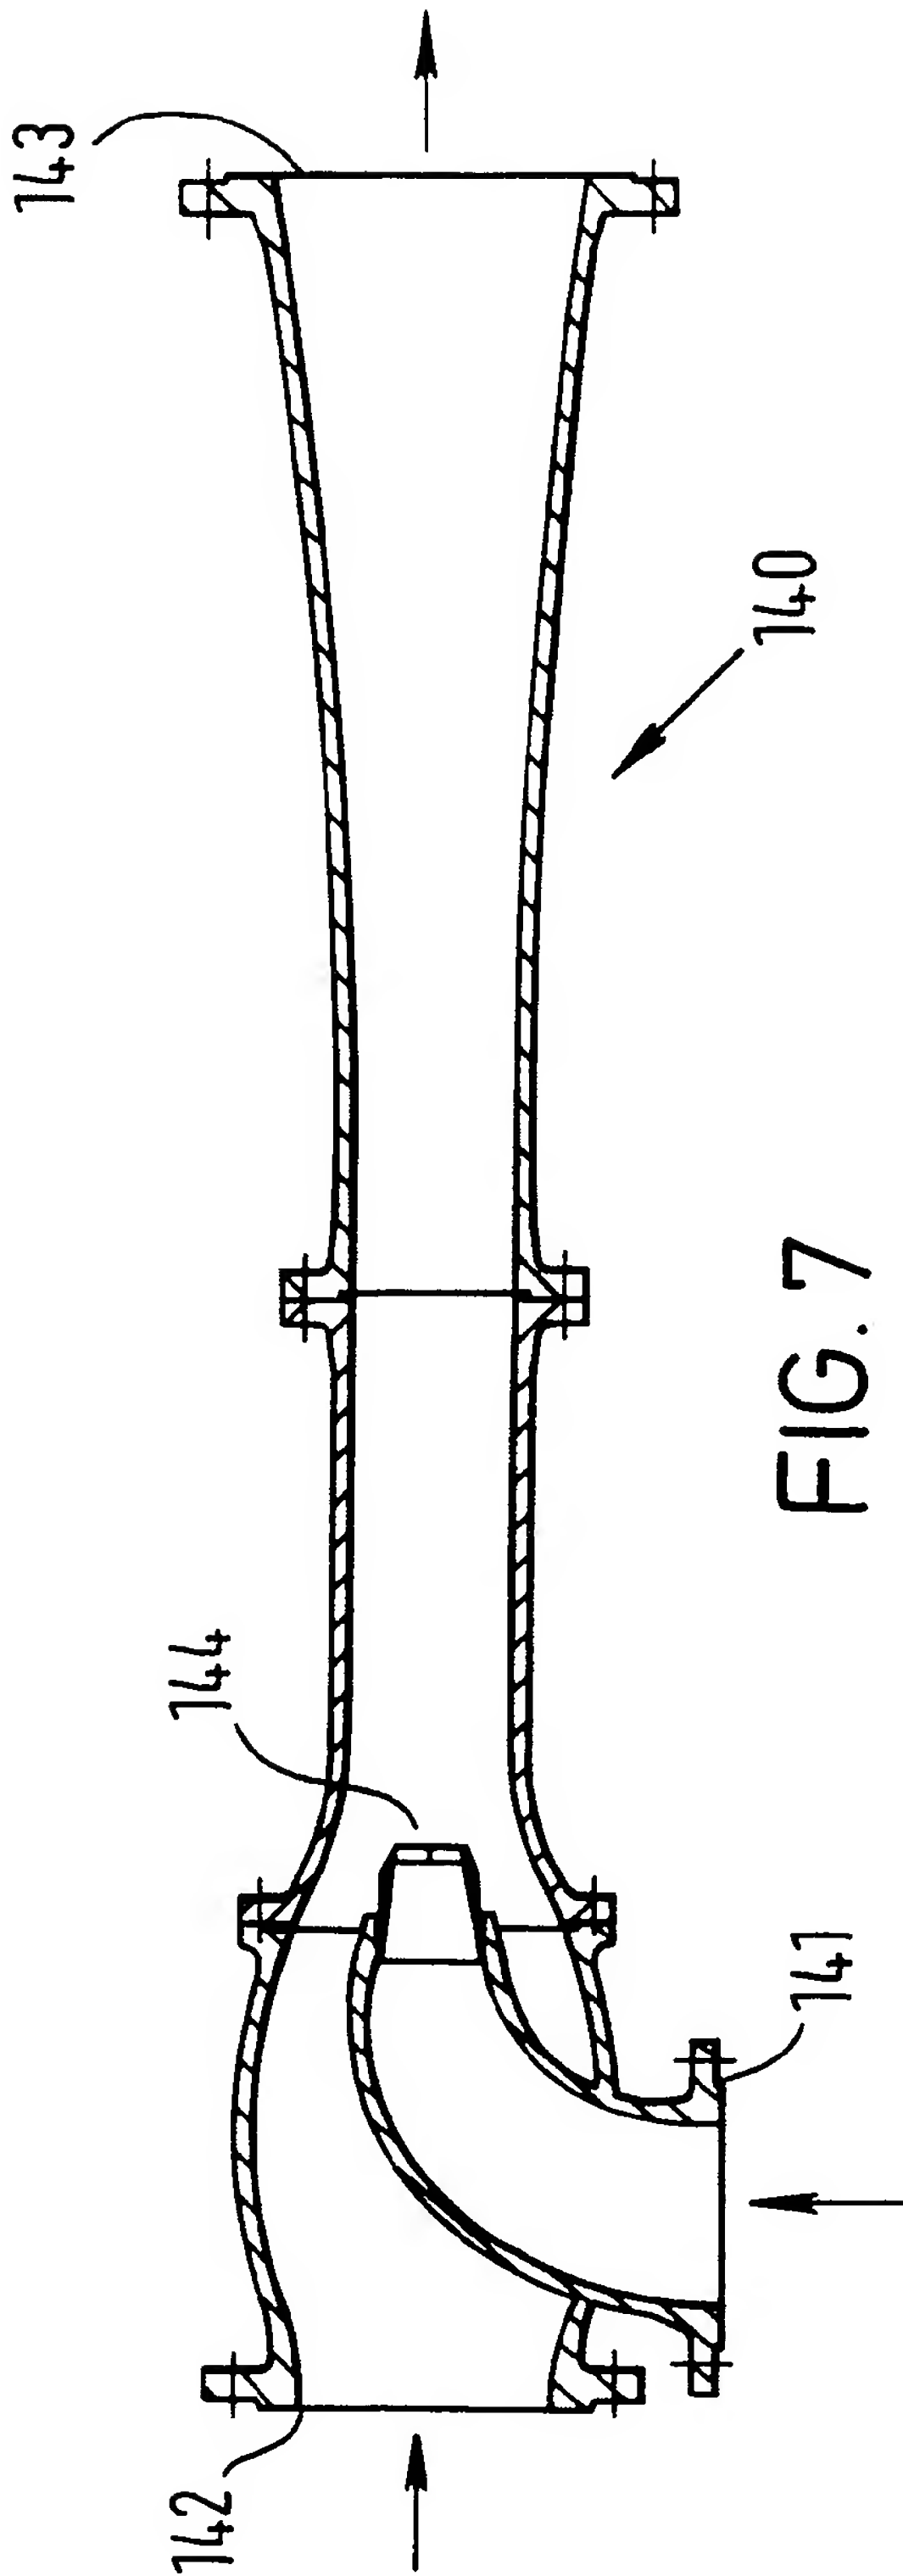


FIG. 6

6 / 11



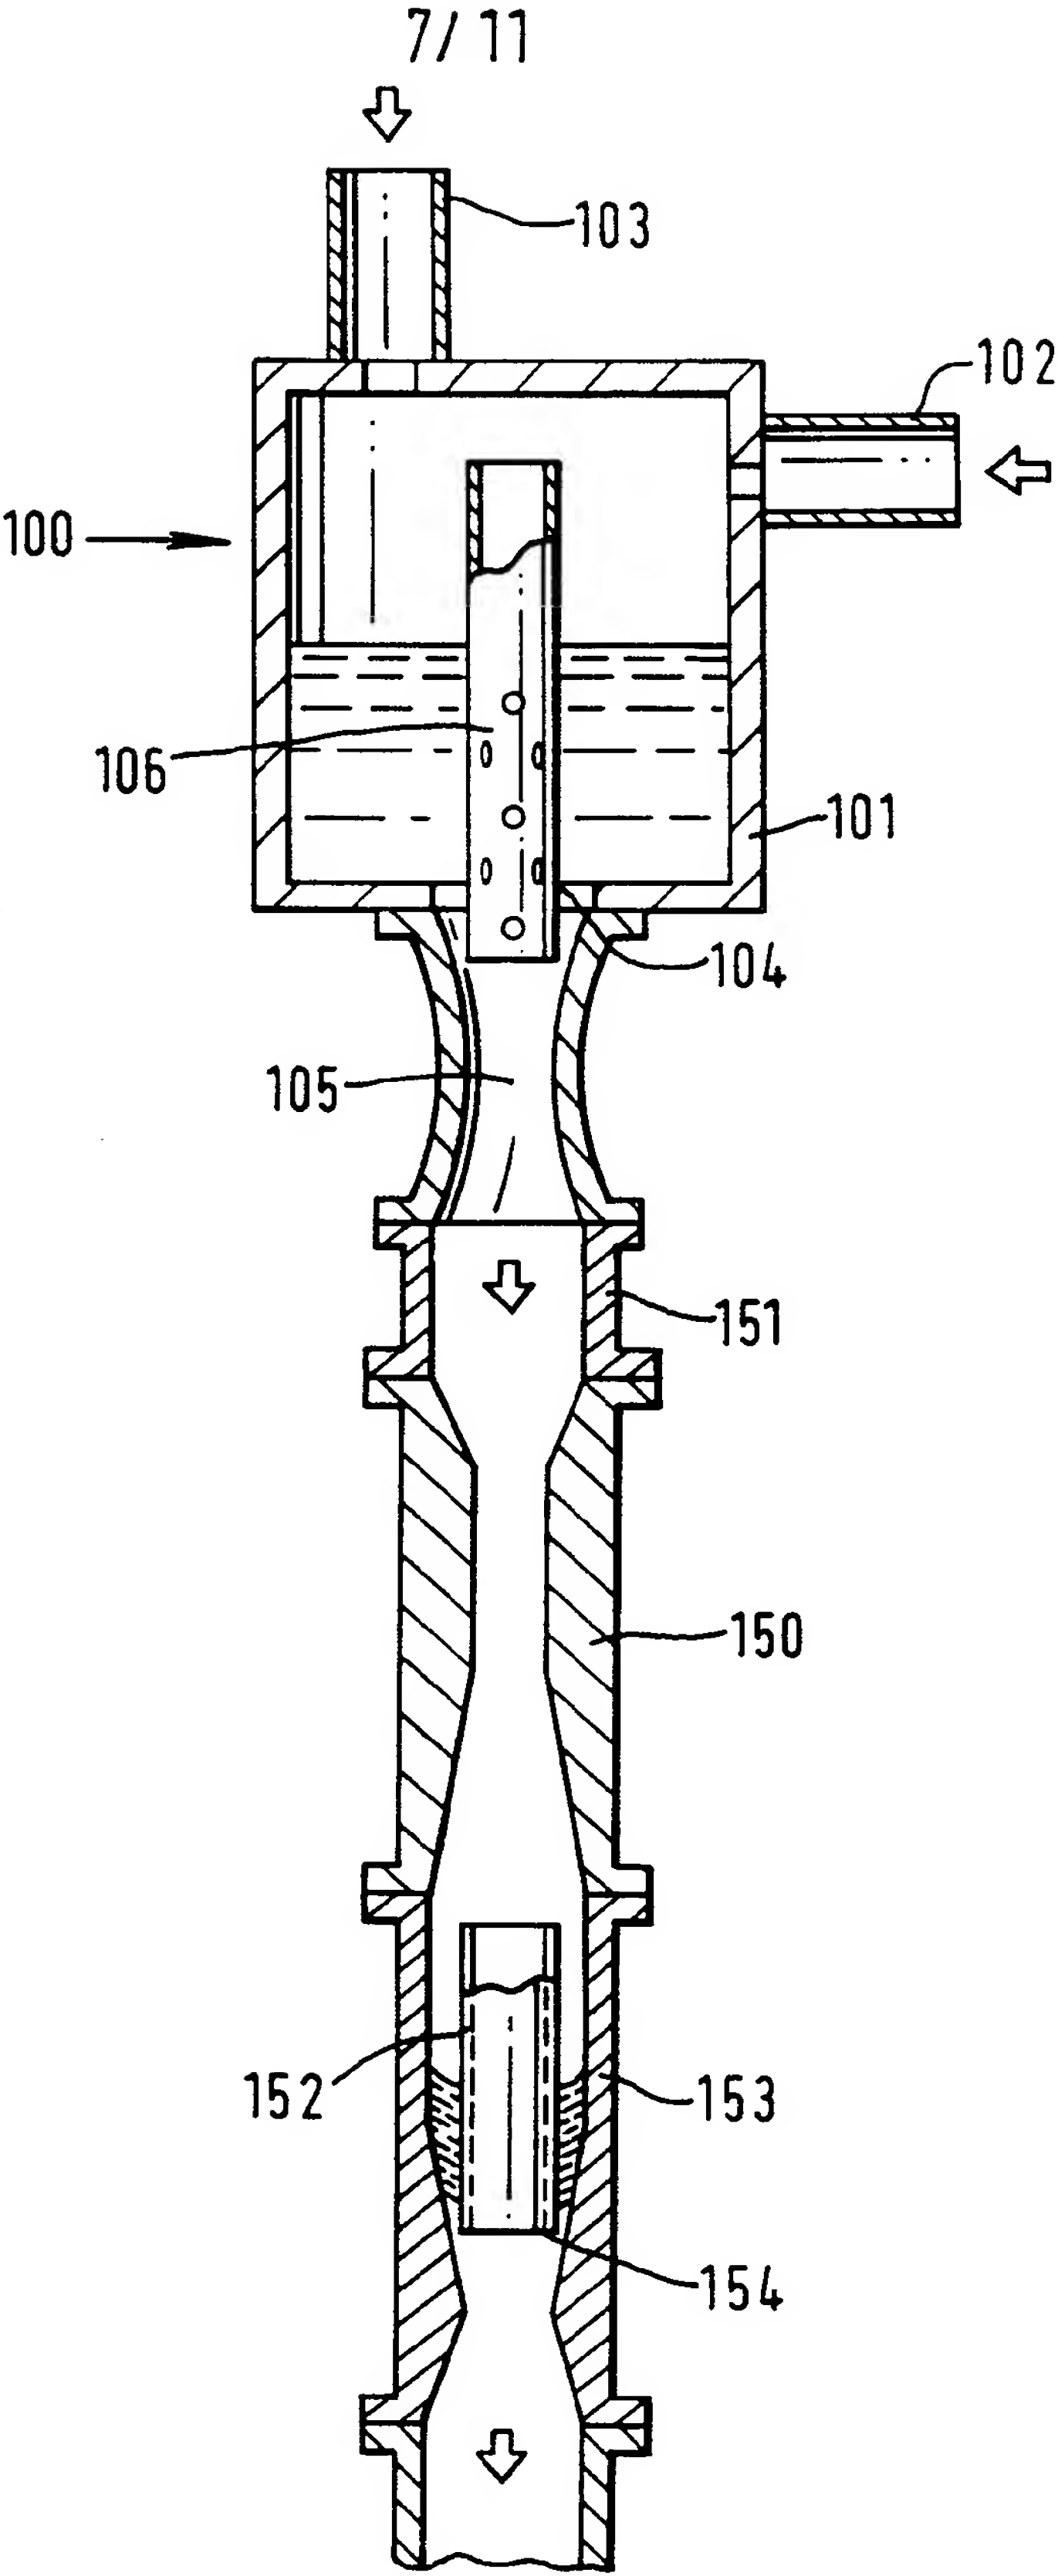


FIG. 8

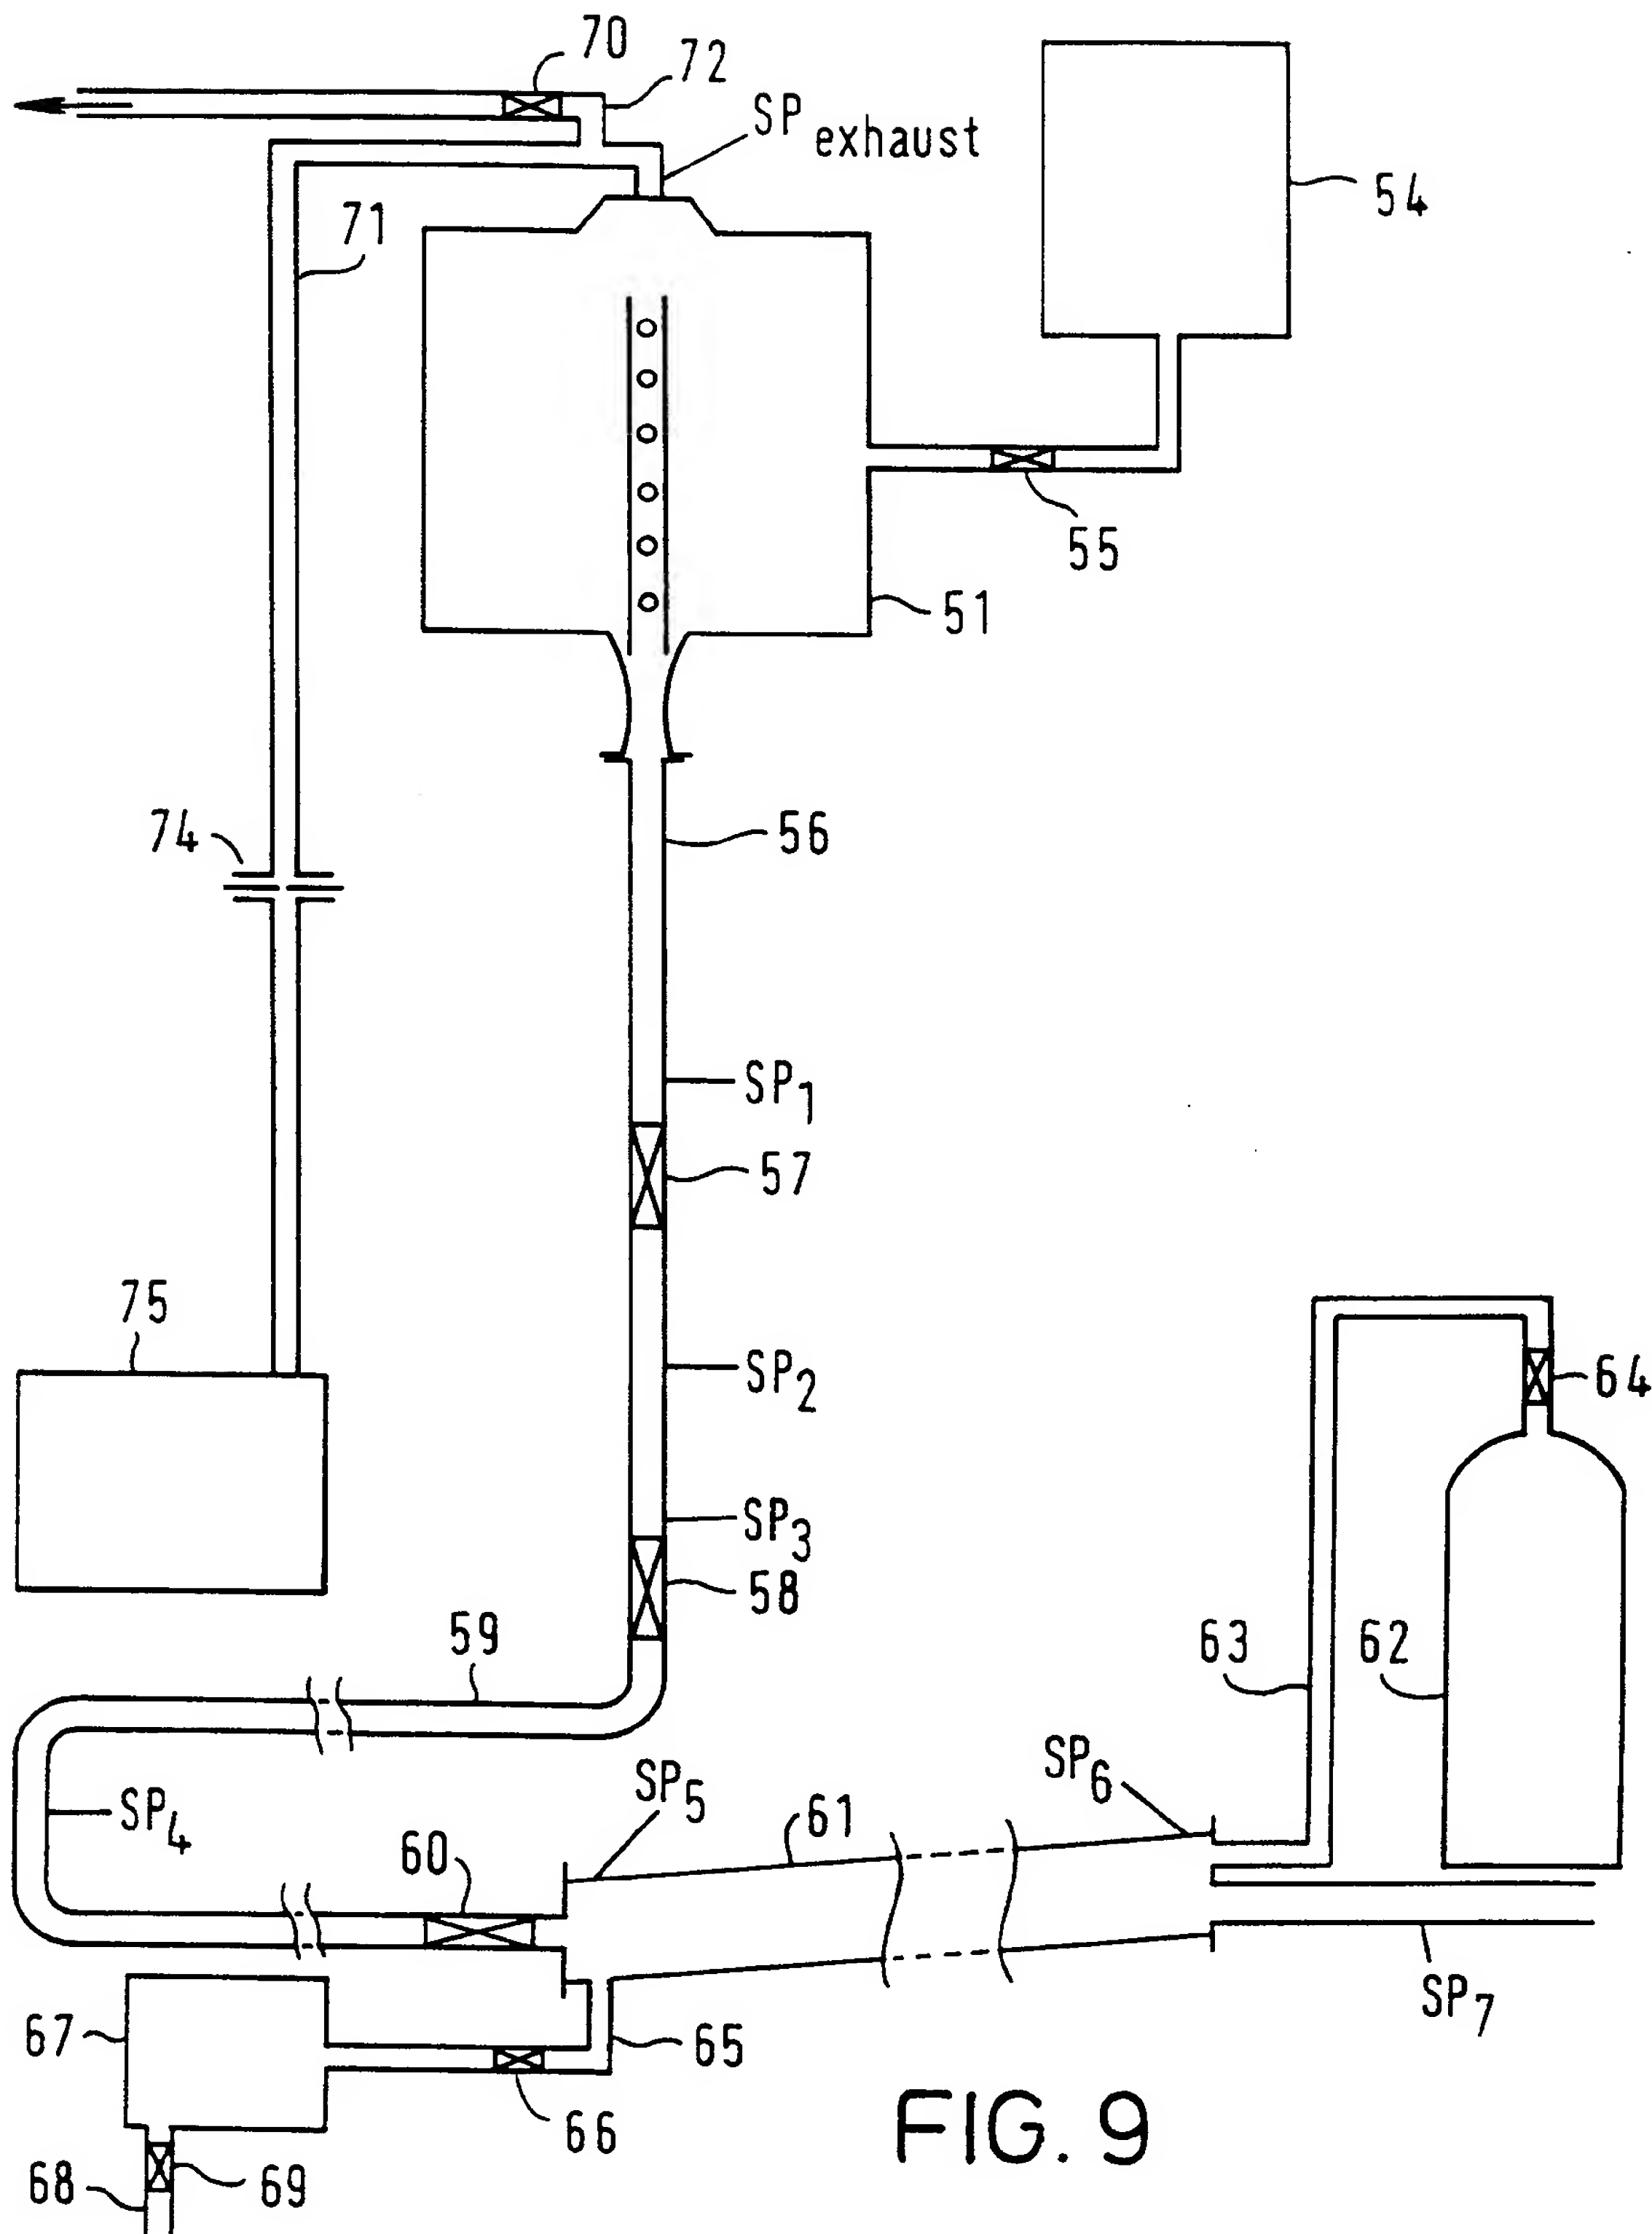


FIG. 9

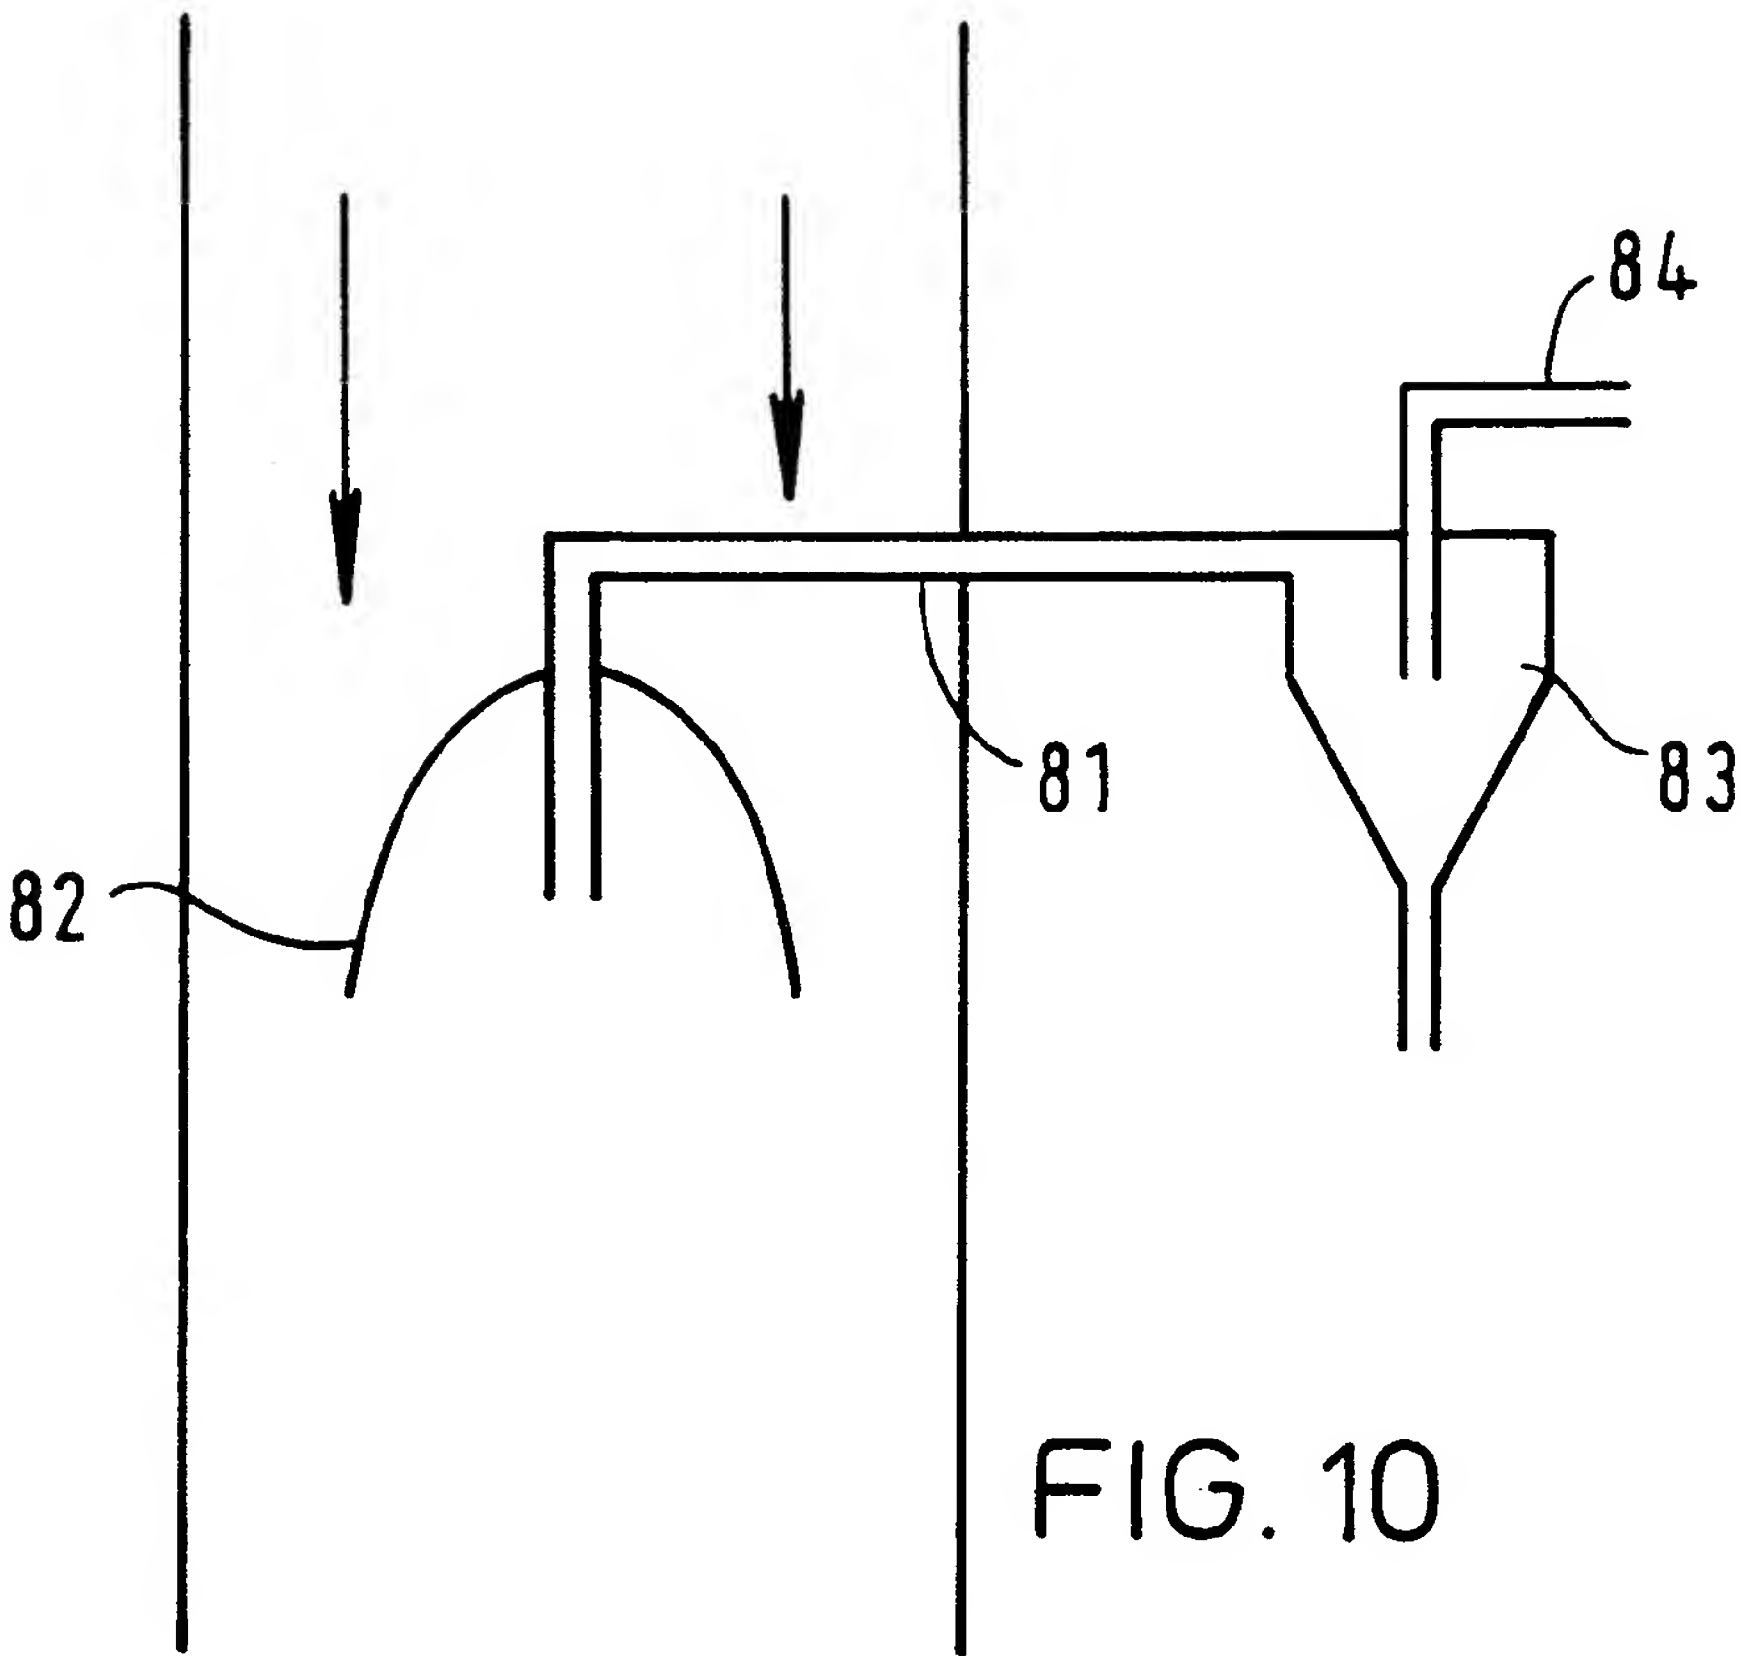


FIG. 10

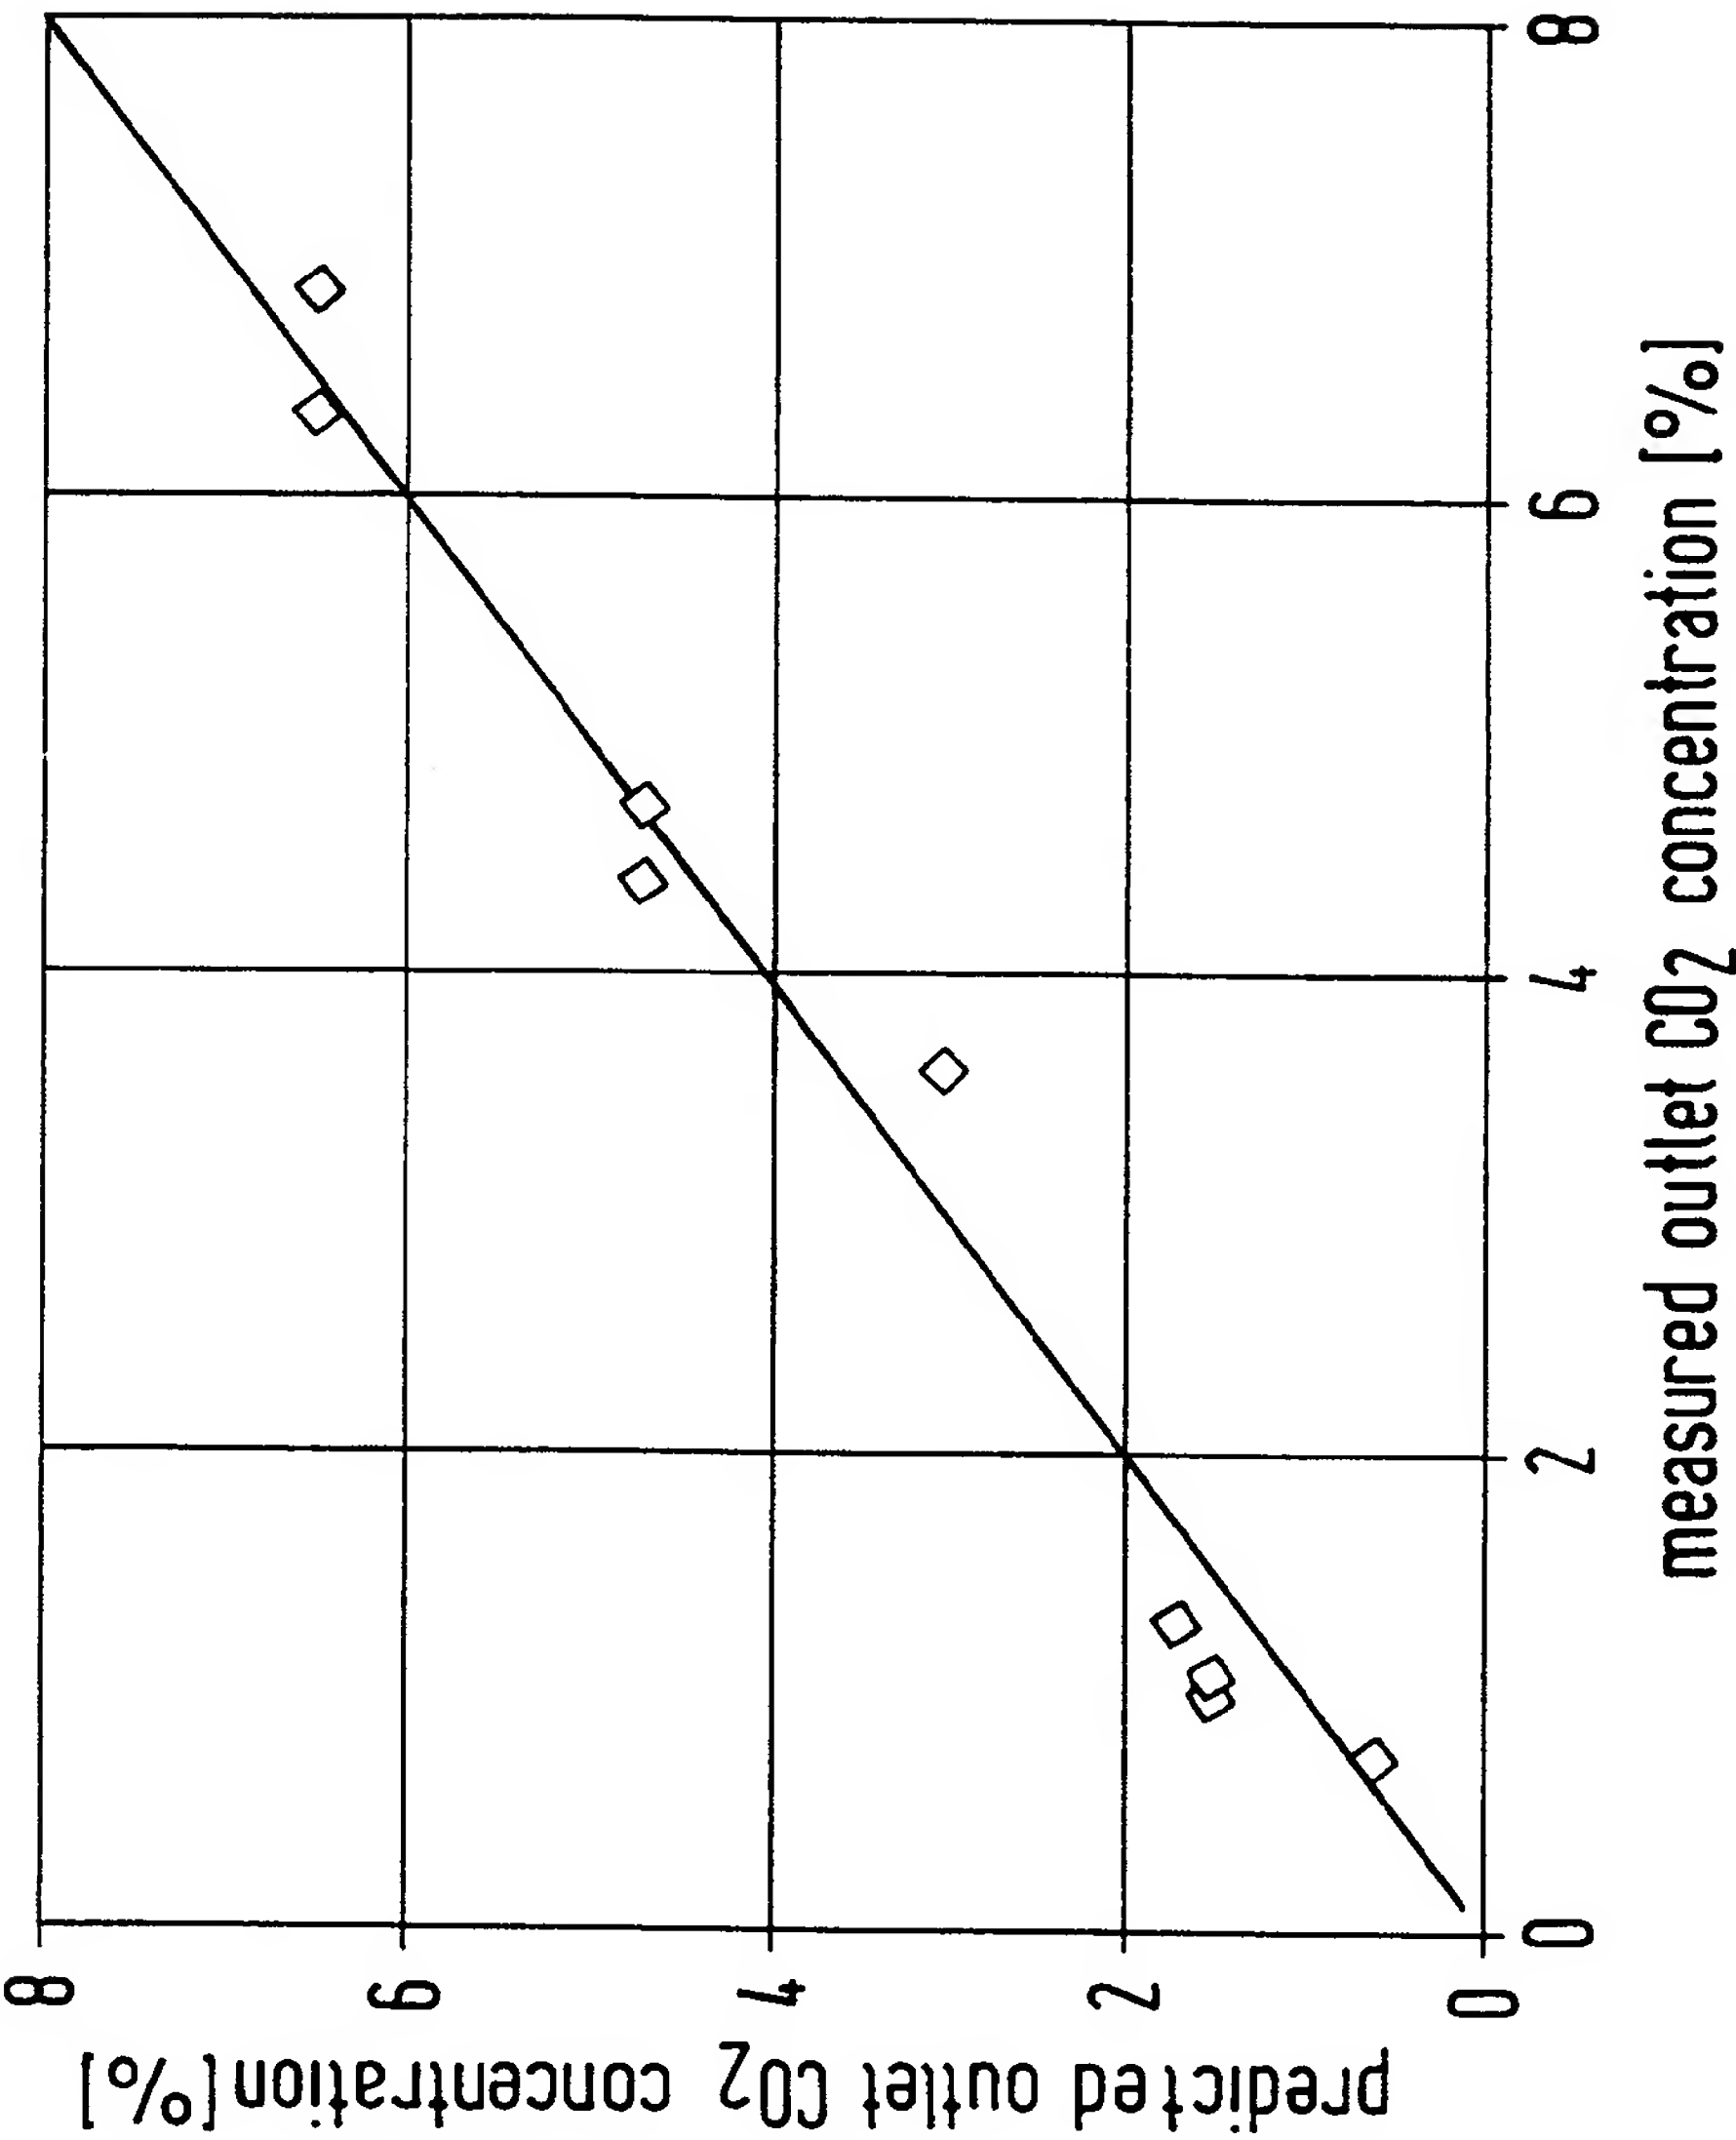


FIG.11

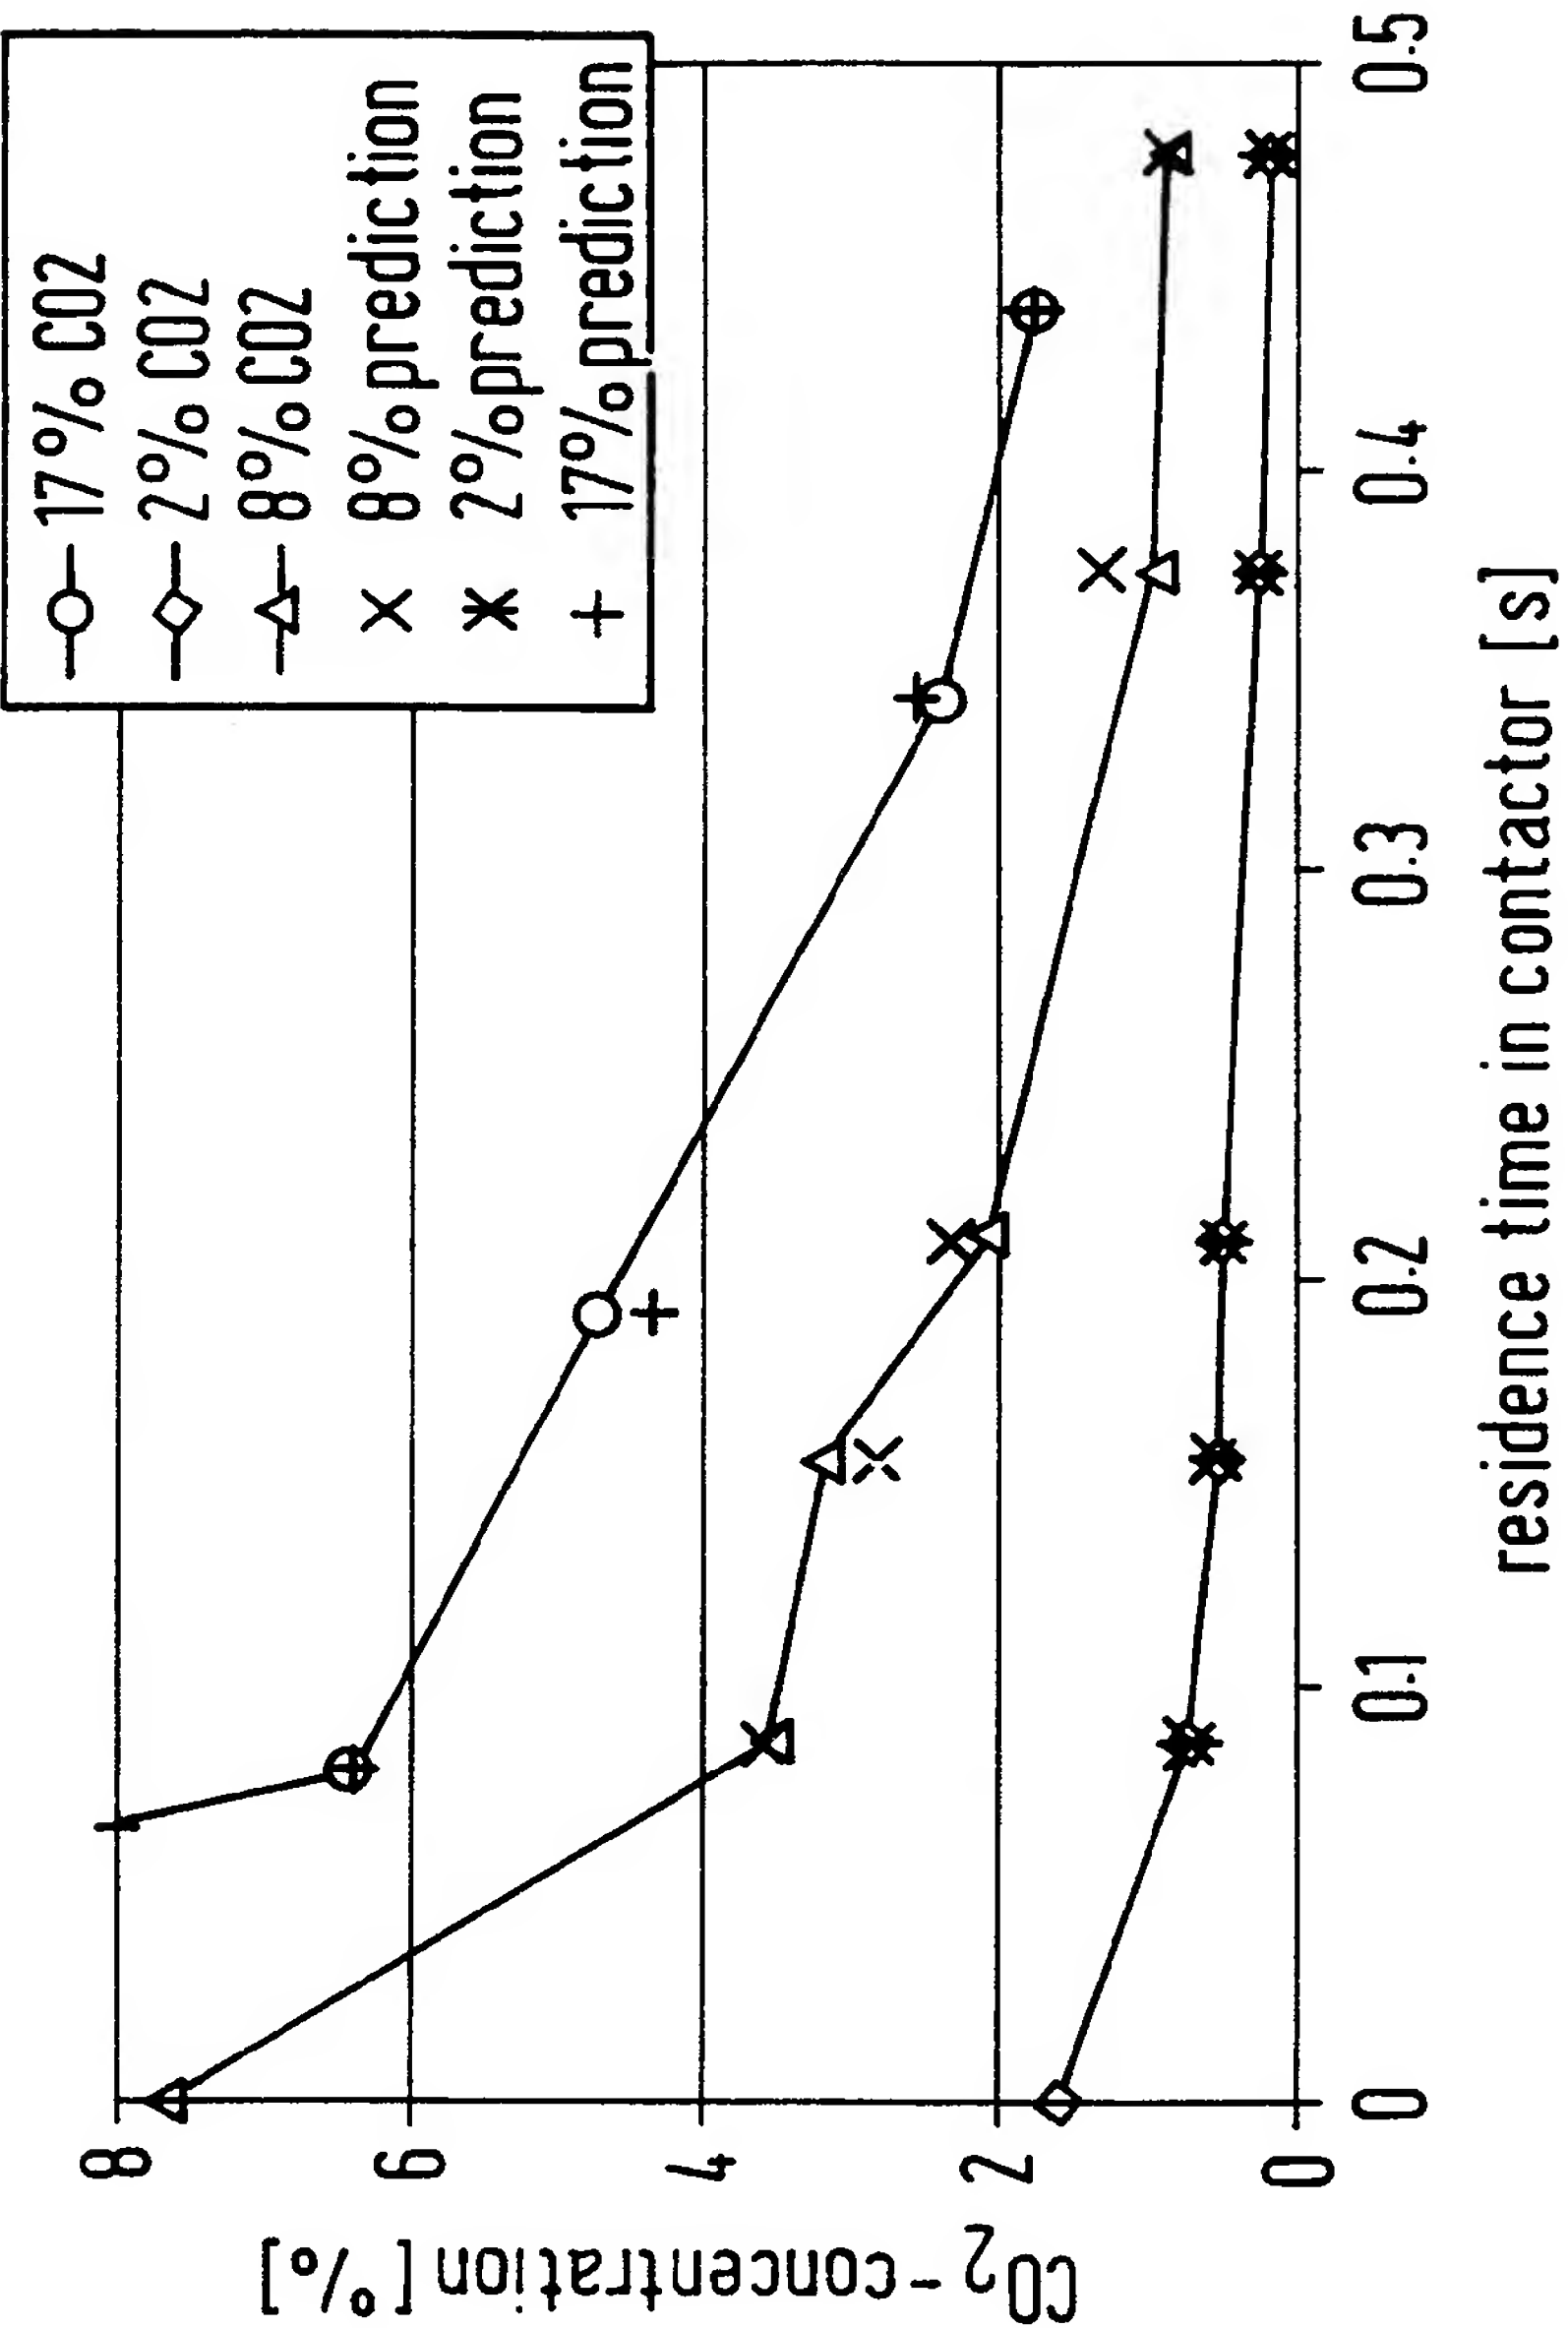


FIG. 12

INTERNATIONAL SEARCH REPORT

national Application No

PCT/GB 98/02772

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B01D53/18 C07C9/04 C07C7/11 B01D53/14 B01J10/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B01D C07C B01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 764 654 A (IDRAVADAN S. SHAH) 9 October 1973	1,3,17, 19-22, 37, 41-43, 55-57
A	see the whole document	2,4-16, 18, 23-36, 38-40, 44-54, 58-67
A	US 4 744 958 A (LADISLAV J. PIRCON) 17 May 1988 see figures	1-67

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

✓ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 December 1998

Date of mailing of the international search report

18/12/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bogaerts, M

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 98/02772

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 200 695 A (FLÄKT AKTIEBOLAG) 5 November 1986 see figure 2 ----	1-67
X	US 4 279 628 A (ROBERT L. WYWER ET AL.) 21 July 1981 see figure 1 ----	55
A	WO 90 13859 A (FRAMO DEVELOPMENTS) 15 November 1990 -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 98/02772

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3764654	A	09-10-1973	NONE
US 4744958	A	17-05-1988	US 3920422 A 18-11-1975
			US 4209502 A 24-06-1980
			AR 193902 A 31-05-1973
			AU 4720972 A 04-04-1974
			BE 790079 A 01-02-1973
			CH 540711 A 15-10-1973
			DD 101819 A 20-11-1973
			DE 2243957 A 26-04-1973
			FR 2183648 A 21-12-1973
			GB 1408046 A 01-10-1975
			IE 36802 B 02-03-1977
			JP 48050360 A 16-07-1973
			NL 7213028 A 24-04-1973
			US 3957465 A 18-05-1976
			US 4036609 A 19-07-1977
			ZA 7206692 A 27-06-1973
			CA 1109648 A 29-09-1981
			US 4358433 A 09-11-1982
EP 200695	A	05-11-1986	SE 454142 B 11-04-1988
			CA 1289458 A 24-09-1991
			DE 3686595 A 08-10-1992
			SE 8501970 A 24-10-1986
US 4279628	A	21-07-1981	NONE
WO 9013859	A	15-11-1990	AU 641649 B 30-09-1993
			AU 5532590 A 29-11-1990
			CA 2032471 A 06-11-1990
			EP 0424503 A 02-05-1991
			EP 0674249 A 27-09-1995
			LT 1778 A, B 25-08-1995
			LV 11070 A 20-02-1996
			LV 11070 B 20-06-1996
			NO 302984 B 11-05-1998
			RU 2093257 C 20-10-1997
			US 5135684 A 04-08-1992